















from danger, no standard is too high.

FEATURES



ACTIVE BRAKE ASSIST¹ This advanced system senses the likelihood of a collision with a vehicle ahead and sends both a visual and audible warning followed by initiating autonomous braking.



ACTIVE DISTANCE ASSIST DISTRONIC®5 This intelligent cruise control system senses traffic conditions and actively controls your speed to keep you at a safe distance.



CROSSWIND ASSIST7 helps stabilize your van and boosts safety in strong, gusting crosswinds. This standard feature helps ensure that your vehicle remains in its lane at highway speeds.



HILL START ASSIST briefly stops the vehicle from rolling backwards or forwards, giving you an extra level of safety and confidence when making a hill start. Hill Start Assist maintains brake pressure for approximately two seconds, so you can remove your foot from the brake pedal without rolling.

European model shown.



360° CAMERA When the Reverse gear is selected, this visual parking aid uses four digital cameras to generate various views of the vehicle's surroundings and show them in real time on the multimedia display.



TRAFFIC SIGN ASSIST uses a camera to give drivers additional help with identifying speed restriction signs, No Passing Zones, and No Entry signs.



BLIND SPOT ASSIST³ Blind Spot Assist now has Rear Cross-Traffic Alert (RCTA), which employs automatic braking to avoid a collision with traffic crossing the vehicle's path (e.g., vehicles or pedestrians) when reversing.



ATTENTION ASSIST®2 helps prevent drowsv driving by monitoring your driving patterns and providing an early warning in case fatigue is detected.



HIGHBEAM ASSISTSM adjusts the highand low-beam headlamps automatically, allowing for continuous adaptation to the prevailing traffic situation. The system helps ensure better and earlier recognition of the course of the road.



ACTIVE LANE KEEPING ASSIST¹⁰ can provide you with visual and audible warnings if your van leaves its lane unintentionally. A camera in the windshield monitors the road ahead and helps detect when you may have veered away from lane markings.



WITH RESCUE ASSIST, SM first responders to an accident can scan a QR code in a Mercedes-Benz Van to quickly see where batteries, airbags, and other structural elements are located in order to safely perform the rescue.




DRIVER AND PASSENGER AIRBAGS⁹ The driver and passenger front, thorax, and window airbags9 help protect you and your passengers in the event of a collision.

Sprinter airbags shown are from Model Year 2014.



PROGRAM (ESP®)8 This dynamic handling system actively intervenes to help keep the van firmly under control and safe by automatically braking individual wheels the vehicle if wheelspin, understeer, or oversteer is detected.





FOR PERFORMANCE

Built to power your workday. Performance is about having the horsepower, torque, and

Performance is about having the horsepower, torque, and hauling capabilities to conquer whatever the day throws at you. The Sprinter gives you the ability to choose between two drivetrains, so you can attack every task with confidence and flexibility. Enjoy turbocharged muscle and the convenience of gasoline in one package with a 4-cylinder turbocharged gasoline engine mated to an industry-leading 9G-TRONIC 9-speed automatic transmission as standard equipment.*

A 3.0L 6-cylinder turbo diesel engine¹¹ with a 7G-TRONIC Plus 7-speed automatic transmission is also available. If you don't want bad weather or road conditions to stop you from getting to work, we're the only manufacturer in the segment offering an optional 4x4 drivetrain with on-demand 4-wheel drive from the factory.

THE EFFICIENCY OF DIESEL. THE CONVENIENCE OF GAS. IT'S YOUR CHOICE.

3.0L 6-CYLINDER TURBO DIESEL¹¹



CONFIGURATION:

DOHC

INDUCTION SYSTEM:

Common-Rail-Direct-Injection (CDI)

BORE/STROKE:

83.0 mm/92.0 mm

HORSEPOWER @ RPM:

188 hp @ 3,800 rpm

TORQUE: Ib-ft @ RPM:

325 lb-ft @ 1,400-2,400 rpm

RANSMISSION:

Automatic Transmission, 7G-TRONIC Plus

2.0L 4-CYLINDER
TURBO GASOLINE



CONFIGURATION:

DOHC

INDUCTION SYSTEM:

Bosch injection (200 bar)

BORE/STROKE:

83.0 mm/92.0 mm

HORSEPOWER @ RPM:


188 hp @ 5,000 rpm

TORQUE: Ib-ft @ RPM:

258 lb-ft @ 2,500-3,500 rpm

TRANSMISSION:

Automatic Transmission, 9G-TRONIC





11

TORQUE: IT'S WHAT'S INSIDE THAT COUNTS.

Horsepower numbers are fine, but torque is what your van needs to get up to speed. What's also important is the rpm at which the peak torque numbers come in. Notice how the Sprinter's peak torque comes in at 1,400 rpm—just above an idle. This means that you'll be at peak torque quickly—and moving from a standing stop efficiently.





Multiple rear-step variations



GASOLINE ENGINE

The Sprinter offers a turbocharged 4-cylinder gasoline engine with Direct Injection and 258 lb-ft of torque as standard equipment.*

EFFICIENT DIESEL ENGINE¹¹

With turbocharged power, 325 lb-ft of torque, and diesel fuel economy, the Sprinter's impressive 6-cylinder engine delivers power and durability in one compact package.





7G-TRONIC PLUS 7-SPEED AUTOMATIC TRANSMISSION

The low first gear and overdrive high gear in the Sprinter's 7-speed automatic transmission help you accelerate from a stop and conserve fuel on the highway.



UP TO A 2-YEAR OR 30,000-KM

Sprinter's Best-in-Class service intervals of up to 2 years or 30,000/km¹² for diesel and up to 1 year or 25,000/km¹² for gas keep you on the road, raising productivity and lowering the total cost



9G-TRONIC 9-SPEED AUTOMATIC TRANSMISSION

This transmission is a first for the segment and features rapid response, a smooth transition between gears, and efficient highway driving.



We are proud to announce that the Sprinter 2500 has won the Canadian Black Book Best Retained Value Award in the Full-size Van category. This marks the eighth year that the Sprinter has received this highly sought-after recognition.13


SERVICE INTERVAL¹²

of ownership.

12

Elimination of display reflections in windscreen



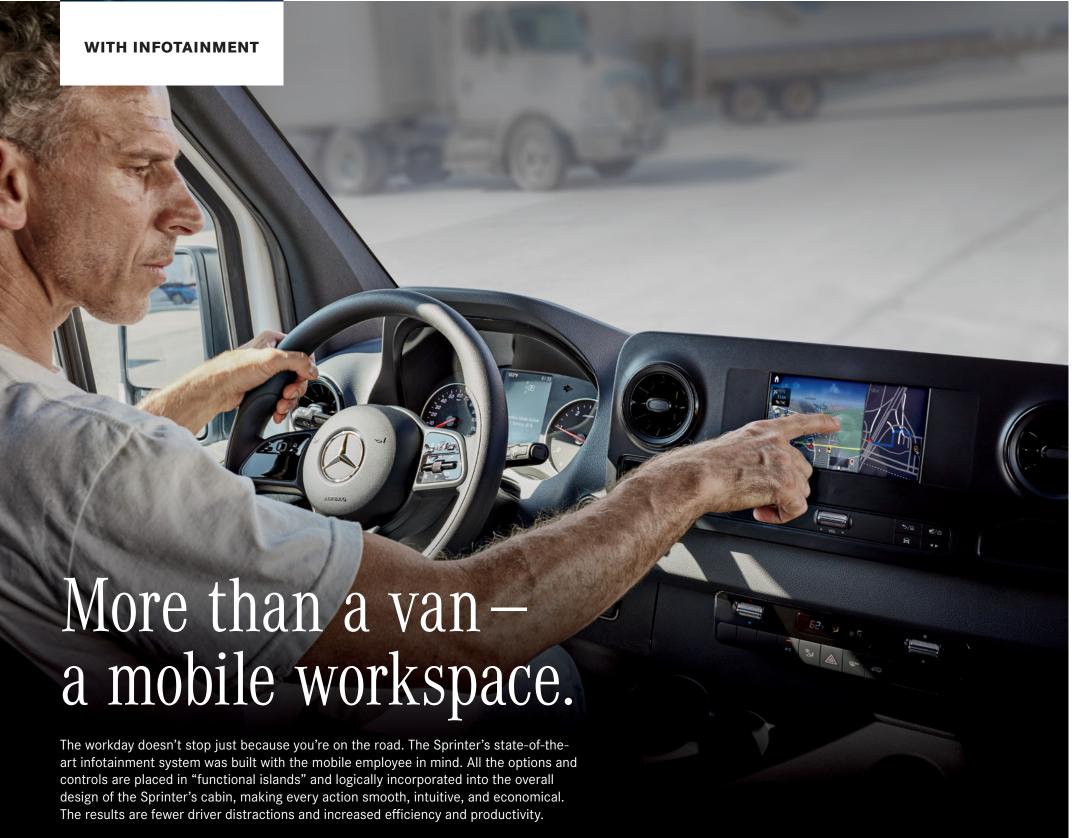

SPRINTER INFOTAINMENT SYSTEM FEATURES:



CHARGING OPTIONS are strategically located on the dashboard and include USB-C ports, wireless, and 12V chargers.



SMARTPHONE INTEGRATION FOR

APPLE CARPLAY® AND ANDROID™ AUTO¹⁴
as well as Bluetooth® capability are now
available in the Sprinter.



THE INNOVATIVE MBUX (MERCEDES-BENZ USER EXPERIENCE) delivers content from navigation to entertainment and includes optional "Hey Mercedes" voice control.



TOUCHSCREENS

For the first time, display screens that are activated via touch, voice control, or touch buttons on the steering wheel are available on the Sprinter.



SIRIUS XM®, SATELLITE RADIO

Add a soundtrack to the workday. Now an option on all models, get music, sports, and news live and on-demand with over 140 channels on Sirius XM® radio.





Hundreds of configurations. Unlimited potential.

When we say the Sprinter is built for you, we mean that literally.

Choose from hundreds of features, configurations, and upfit solutions that give you the ability to build a van equipped to tackle your job's toughest challenges. It's the difference between a van that you merely drive and a van that is driven to help you succeed.

Sprinter Cargo Vans are available in 2500, 3500, 3500XD, and 4500 series.





Available on the Single tire models, this wheel arch covering's square shape and flat top provide extra storage opportunities, as well as protection for the wheel arch.



The rear doors feature new hinges with self-locking mechanisms.



LED strip lighting improves cargoloading vision.



New pallet bracing and tie-downs help when hauling cargo with unusual sizes and shapes¹⁵



The Sprinter 4500 model sets a new benchmark for payload capacity of up to 3,070 kg (6,768 lbs.).

TWO ROOF HEIGHTS

STANDARD ROOF

Max: 242.6 cm (95.5")



2500 Max: 244.6 cm (96.3") 3500XD Max: 248.7 cm (97.9") 4500 Max: 248.4 cm (97.8") HIGH ROOF

Max: 242.6 cm (95.5")



2500 Max: 272.5 cm (107.3")
3500 Max: 277.9 cm (109.4")
3500XD Max: 277 cm (109.1")
4500 Max: 275.7 cm (108.5")

THREE LENGTHS



593.2 cm (233.5") (144" WB)

696.7 cm (274.3") (170" WB)

736.7 cm (290") (170" EXT. WB)

SPRINTER CARGO QUICK FACTS

MAXIMUM PAYLOAD: 3,070 kg (6,768 lbs.)



MAXIMUM CARGO VOLUME: 15.1 m³ (532.6 cu. ft.)



MAXIMUM TOWING CAPACITY:¹⁶ 3,402 kg (7,500 lbs.)



MAXIMUM CARGO FLOOR LENGTH: 481 cm (189.4 in)



ENGINES:

2.0L 4-cylinder turbo gasoline,*
3.0L 6-cylinder turbo diesel⁵





9G-TRONIC 9-speed Automatic Transmission, 7G-TRONIC Plus 7-speed Automatic Transmission

MAXIMUM INTERIOR STANDING HEIGHT: 200.9 cm (79.1")

^{*}Gasoline engine not available on all models.

Sprinter Crew Vans are available in 2500, 3500, 3500XD, and 4500 series.

Carrying you forward.

Getting your team and their equipment to a job can be a battle. We designed the

standard equipment.* A V6 turbo diesel engine¹¹ with a 7G-TRONIC

Plus 7-speed automatic transmission is also available.

Sprinter Crew Van to win that battle - it seats up to five and still has room for material

or cargo. It's the only factory crew configuration in its class, and a 4-cylinder turbocharged gasoline engine with a Best-in-Class 9G-TRONIC 9-speed automatic transmission is now

SPECIFICATIONS



The removable 3-seat bench is covered in durable upholstery and gives your crew a roomy, safe, and comfortable ride.



In addition to seating for up to five people, the Sprinter Crew Van features ample cargo space.

ONE ROOF HEIGHT

HIGH ROOF

Max: 242.6 cm (95.5")



Max: 273 cm (107.5") Max: 277.9 cm (109.4") Max: 277.9 cm (109.4") 3500XD Max: 276.7 cm (108.9")

TWO LENGTHS



593.2 cm (233.5") (144" WB)

696.7 cm (274.3") (170" WB)

SPRINTER CREW QUICK FACTS



MAXIMUM PAYLOAD: 2,860 kg (6,305 lbs)



MAXIMUM CARGO VOLUME: 10.5 m³ (370.8 cu. ft.)



MAXIMUM TOWING CAPACITY:16 3,402 kg (7,500 lbs)



MAXIMUM CARGO FLOOR LENGTH: 366.4 cm (144.3 in)





2.0L 4-cylinder turbo gasoline,* 3.0L 6-cylinder turbo diesel⁵



MAXIMUM INTERIOR STANDING HEIGHT: 194.9 cm (76.7")



9G-TRONIC 9-speed Automatic Transmission, 7G-TRONIC Plus 7-speed Automatic Transmission




SEATING CAPACITY: Up to five

^{*}Gasoline engine not available on all models.

SPECIFICATIONS

Sprinter Passenger Van 2500 series.





The Sprinter Passenger Van offers seating for up to 15 adults



An impressive interior standing height of up to 191.8 cm (6'3") provides greater passenger comfort with plenty of room to move.



Roof air conditioning comes in two output levels, including a high-performance air conditioner.



The ergonomic rear seats have individual headrests and an available reclining option.



The maximum 177.4 cm (69.8") floor width and generous legroom mean there's plenty of room to sit and stretch out.

ONE ROOF HEIGHT

HIGH ROOF 234.5 cm (92.3")



500 Max: 290.1 cm (114.2")

TWO LENGTHS




593.2 cm (233.5") (144" WB)

696.7 cm (274.3") (170" WB)

TWO INTERIOR CONFIGURATIONS

12-PASSENGER (144" WB)



SPRINTER PASSENGER QUICK FACTS



MAXIMUM PAYLOAD: 1,425 kg (3,142 lbs)



MAXIMUM CARGO VOLUME: 3.1 m³ (111.2 cu. ft.)



MAXIMUM TOWING CAPACITY:¹⁶ 2,268 kg (5,000 lbs.)



TRANSMISSION:
7G-TRONIC Plus 7-speed
Automatic Transmission



3.0L 6-cylinder turbo diesel⁵



MAXIMUM INTERIOR STANDING HEIGHT: 191.8 cm (75.5")





All measurements in centimetres/inches. All width measurements include mirrors. See page 40 for a complete listing of models and specifications.

Sprinter Cab Chassis Vans are available in 3500XD and 4500 series.





Choose between the standard 3500XD model (GVWR of 5,003 kg/11,030lbs) or the 4500 model (GVWR of 5,500 kg/11,030lbs) and build the Sprinter Cab Chassis that works best for you.



The Sprinter's flat unobstructed frame rails are the perfect place to bring your vision of the ideal business vehicle to life.

ONE ROOF HEIGHT

242.6 cm (95.5")



Max: 239 cm (94.1") 4500 Max: 239.7 cm (94.4")

TWO LENGTHS



624.6 cm (245.9") (144" WB)



694.6 cm (273.5") (170" WB)

SPRINTER CAB CHASSIS QUICK FACTS



MAXIMUM PAYLOAD:

3,370 kg (7,429 lbs.)



3.0L 6-cylinder turbo diesel5



See page 42 for a complete listing of models and specifications.

TRANSMISSION:

7G-TRONIC Plus 7-speed Automatic Transmission



MAXIMUM TOWING CAPACITY:16 3,402 kg (7,500 lbs.)



SEATING CAPACITY:

Up to three

Sprinter 4x4 Van is available in 2500 and 3500XD series.



PASSENGER

ONE ROOF HEIGHT

HIGH ROOF

234.5 cm (92.3")



2500 Max: 298.7 cm (117.6")

ONE LENGTH



593.2 cm (233.5") (144" WB)

CREW

ONE ROOF HEIGHT

HIGH ROOF

Max: 242.6 cm (95.5")



2500 Max: 282.6 cm (111.3") **3500XD** Max: 282.5 cm (111.2")

TWO LENGTHS



593.2 cm (233.5") (144" WB)

696.7 cm (274.3") (170" WB)

CARGO

TWO ROOF HEIGHTS

STANDARD ROOF

Max: 242.6 cm (95.5")

2500 Max: 254.3 cm (100.1") **3500XD Max:** 254.2 cm (100.1") **HIGH ROOF**

Max: 242.6 cm (95.5")



2500 Max: 281.7 cm (110.9") **3500XD** Max: 281.8 cm (110.9")

THREE LENGTHS



593.2 cm (233.5") (144" WB)

696.7 cm (274.3") (170" WB)

736.7 cm (290") (170" EXT. WB)

All measurements in centimetres/inches. All width measurements include mirrors. A complete listing of models and specifications begins on page 36.





Finance solutions.

The Sprinter is built for you, with the flexibility to configure a solution that will meet your exact needs. That's what Mercedes-Benz Financial Services are designed to do as well. If you're looking to lease or purchase, we offer a variety of products and solutions with flexible benefits and competitive rates that will meet your business needs.¹⁷

For more information, visit mercedes-benz.ca/en/financial-services

Mercedes-Benz Financial Services









ROADSIDE ASSISTANCE¹⁸

All Mercedes-Benz Vans come standard with our 24-hour Roadside Assistance Program¹⁸ and expert advice 24/7 through the Mercedes-Benz Customer Assistance Centre, providing you with peace of mind and help when you need it most.

ServiceCARE — Service solutions built for you

Whether it's a maintenance service, unexpected warranty work, or wear and tear repair, our ServiceCARE products are customized solutions for you. You can now focus on your business with your vehicles always in top shape, minimizing your downtime and maximizing your financial cost control.

Complete The all-inclusive service package

Service Repair Wear & Tear

If you require comprehensive additional protection for your van, look no further than our Complete product. This package covers all workshop work, including wear and tear repairs. The vehicle is ready for action when you need it, and you keep costs safely under control.

Extended Limited Warranty (ELW) More warranty. More certainty.

Service Repair Wear & Tear

The Extended Limited Warranty product offers you greater coverage for mechanical, electrical, and electronic components. It protects you against unforeseen repair costs, and without any deductibles, you get the benefit of predictable and attractive conditions.

Regular and accurate checking of the most important vehicle parts

performance and reliability. Maintenance prevents unnecessary

and functions ensures that your van continues to deliver outstanding

Maintenance (PPM) Keeping your van in top shape

Service Repair Wear & Tear

2 services / 5 years

4 services / 5 years

Mercedes-Benz (a) SERVICECARE

Term*

3 years / 100,000 km

4 years / 130,000 km

5 years / 160,000 km

Term*

5 years / 160,000 km

6 years / 200,000 km

7 years / 250,000 km

Term*

6 services / 5 years

'For detailed warranty coverage information, please check the vehicle manufacture warranty booklet.

repair costs and keeps downtime minimal.

SPRINTER OVERVIEW

Applies to all Sprinter models

POWERTRAINS	EN	IGINE					
	2.0L 4-Cylinder Turbo Gasoline	3.0L V6 Turbo Diesel					
Configuration	DOHC	DOHC					
Fuel injection	Direct	Direct					
Induction system	Bosch Injection	Common-Rail-Direct-Injection					
Cylinders	4	6					
Cylinder heads	Aluminum	Aluminum					
Block material	Aluminum	Aluminum					
Bore/stroke	83.0mm/92.0mm	83.0mm/92.0mm					
Compression ratio	9.8:1	18.0:1					
Transmission	9G-TRONIC 9-Speed Automatic Transmission	7G-TRONIC Plus 7-Speed Automatic Transmission					
Horsepower @ rpm	188 hp @ 5,000 rpm	188 hp @ 3,800 rpm					
Torque lb-ft @ rpm	258 lb-ft @ 2,500-3,500 rpm	325 lb-ft @ 1,400-2,400 rpm					
Recommended fuel	Regular 87 Octane	B5 Diesel					
Fuel tank capacity	83.3 Liters	92.7 Liters					

	STANDARD	FEATURES	
	ME	CHANICAL	
Gasoline engine only	Diesel engine only	Gasoline and Diesel engines	
Engine: 2.0L 4-Cylinder Turbo Gasoline	• Engine: 3.0L V6 Turbo Diesel	Body Builder Connector	Pre-installation for Switch Panel (not available on 4x4)
9G-TRONIC 9-Speed Automatic Transmission	7G-TRONIC Plus 7-Speed Automatic Transmission	Exhaust Straight to Rear	Pre-wiring for Trailer Hitch
AGM battery 12V/70Ah	Alternator 14V/220 A	Jump-Start Terminal	Remote Key (315mhz) with Central Locking
Generator 14V/250A	3rd Generation SCR Emission Control System	Pre-installation PSM	Starter Battery Disconnect
SULEV Emissions	ULEV/SULEV Emissions*		
• Service Interval: 25,000 km/1 Year ¹²	Fuel Filter with Water Separator		
	• Service Interval: 30,000 km/2 Years ¹²		
SEATING	EXTERIOR	IN	TERIOR
Adjustable Driver Seat	Dual-Circuit 4-Wheel Disc Brakes	Adjustable Steering Wheel (Angle)	Outside Temperature Gauge
Adjustable Front Passenger Seat	Front and Rear Mudflaps	Air Conditioning, Front	Pre-wiring Communication Module (LTE) for Dig. Services
Armrest for Driver's Seat	 Rear Doors Opening to Side-Wall (Optional on 144" & 170" models) 	Cupholder, Front	Shelf Above Windshield

Red Diesel Filler Cap (Diesel only)

Windshield with Filter Band

			 Wood floor with 6 D-rings available on Crew models.
TIRES & WHEELS		SAFETY & SECURITY	
All-Season Tires	4-Wheel Anti-Lock Braking System (ABS)	Hill Start Assist	Thorax-Pelvis Side Airbags, Driver/ Passenger
Unspecified Tire Brand	Airbag, Driver/Passenger Front	HOLD Function	Window Side Airbags, Driver/Passenger
	• Crosswind Assist ⁷	Load-Adaptive Electronic Stability Program (ESP®) ⁸	
*ULEV Emissions below 10,000 lbs.	Headlight Assistant	Seat Belt Reminder, Driver/Passenger	

• Heater, Auxiliary Electric Hot Air

• Jack, Hydraulic

• Keyless Start

• Speedometer, km/h

Storage Compartment Underneath Cockpit

Standard Radio

• USB-C Socket, 5V

		SPRII	NTER MODEL OVER	:VIEW		
Body	Length	Roof Heights	2500 Model	3500 Model	3500XD Model	4500 Model
	STANDARD	STANDARD ROOF	0 4×4		0 4×4	0
	(144")	HIGH ROOF		0		
CARGO VAN	LONG (170")	HIGH ROOF	6 D 4×4	0	0 4×4	0
	EXTRA LONG (170" EXT)	HIGH ROOF	0 4×4	0	0 4×4	0
	STANDARD (144")	HIGH ROOF	0 4 = 4	0	0 4×4	0
CREW VAN	LONG (170")	HIGH ROOF	6 D 4×4	0	0 4×4	0
DASSENCED	STANDARD (144") 12-PASSENGER	HIGH ROOF	0 4×4			
PASSENGER VAN	LONG (170") 15-PASSENGER	HIGH ROOF	0			
	STANDARD (144")	STANDARD ROOF			0	0
CAB CHASSIS	LONG (170")	STANDARD ROOF			0	0

Gas engine available
Diesel engine available

4x4 only available with diesel engine.

Armrest for Front Passenger Seat

Fabric, Maturin Black



ADDITIONAL STANDARD												ı	I	
FEATURES (CARGO)	2500	3500	3500XD	4500		2500	3500	3500XD	4500		2500	3500	3500XD	1
MECHANICAL			-	-				_				35	3,5	,
Aux. fuel sending unit with fuel tap** Axle ratio 3.923**	X	Х	Х	Х	Cable duct – side-wall Front axle reinforced	Х	X	Х	X		Х	Х	X	
Axle ratio 4.182 (standard on 2500 gas models only)	Х	Х	Х	Χ	Omission bulkhead	Х	Х	Х	Х		Χ		Ĺ	
Cable duct – rear portal	X	Х	Х	Х										
NTERIOR	Ιv	Ιv	X	Ιv	 									
Interior lights, cargo compartment	X	<u> ^</u>	X	<u> </u>	TIRES & WHEELS					TIRES & WHEELS (CONTINUED)				
3rd brake light	Ιx	Х	X	Х	5.5 x 16 steel wheels		Х	Х	X	1		Х	Ιx	
· High roof***	Х	Х	Х	Х	6.5 J x 16 steel wheels	Х			Ë	• Tires LT 245/75 R16	Χ		Ĺ	
Rear doors, 180° opening	X	X	X	X	Dual rear wheel tires Spare wheel	X	X	X	X			L v	Τv	_
Rear mudflaps Sliding door, passenger side	X	X	X	X	Spare wheel Spare wheel bracket below frame	X	X	X	X		X	X	X	
OPTIONAL FEATURES (CARGO)	2500	3500	3500XD	4500		2500	3500	3500XD	4500		2500	3500	3500XD	200
MECHANICAL				1			35	35	45					
12V power outlet, rear compartment 115V socket	X	X	X	X	Axle ratio 4.182 (optional on 2500 diesel models only) Backup alarm	X	X	Х	Х	Misfueling prevention for diesel** Omission of D-Rings	X	X	X	
Additional bar for driveshaft	П				Cruise control	Х	Х	X	X		X	Х	X	
& exhaust extension ^{†††}	X	X	Х	Х	Cutoff relay for additional battery	Х	Х	Х	Х	Speed limitation, 65 mph	Х	Х	X	
 Additional battery for retrofit consumers, driver seat base 	X	X	Х	Х	Deactivation lamp monitoring failure Electric parking brake	X	X	X	X	Stabilization Level II [†] Suspension for comfort and load protection [†]	X			
Additional battery for retrofit consumers,	X	x	X	Х	Engine oil level display at cold start**	Х	Х	Х	Х	Top speed limitation, 75 mph	Х	Χ	X	
engine compartment Additional DIN-slots	X	X	Х	X	Front axle reinforced (standard on 4500 model) [†] Fuel gauge, optimized for aux. fuel tap** [†]	X	X	X	X	Front engine bracket for additional alternator Front engine bracket for auxiliary A/C	X	X	X	
AGM battery 12V 95Ah 850A	Х	Х	Х	Х	Speed limitation, 65 mph				Х	Compressor			1	
Axle ratio 3.923**	_	X	X	X	Starter upgraded**	X	L X	l x	X					
Artico Man-made Leather Black	X	Х	Х	Х	Heated driver seat	Х	Х	Х	X	Heated front passenger seat	Х	Х	Ιx	
Fabric Caluma Black	Х	Χ	Χ	Χ						·				
NTERIOR		_		_				_	_		_	_	_	
2nd row, fixed window, driver side 2nd row, fixed window, passenger side	X	X	X	X	Electrically heated windshield Fixed sunroof (rear roof section)	X	X	X	X		X	X	X	
Acoustic Package	X	X	X	X	Floor covering, plastic	X	X	X	X		X	X	Ϊ́х	
Assist handle, B-pillar	Х	Х	Х	Х	Fuel-fired heater booster (18,000 BTU)**	Х	Х	Х	Х		Χ	Χ	X	
Assist handle, left rear door Assist handle, right rear door	X	X	X	X	Fuel-fired pre-heater/booster (17,000 BTU)** Half height load compartment trim	X	X	X	X		X	X	X	
Cab rear wall liner	Х	Х	Х	Х	Heat insulation, front compartment	Х	Х	Х	Х	Rear window defroster	Χ	Х	Х	′
Cargo lashing rails, head height	X	X	X	X	Heat insulation, rear compartment	Х	X	X	X		X	Х	X	
Cargo partition Cargo partition with one window	X	X	X	X	Hinged lid for storage compartment Illuminated front exits	X	X	X	X		X	X	X	
Cargo straps, D-rings ¹⁵	Х	Х	Х	Х	Instrument cluster with color display	Х	Х	Х	Х	Side-wall paneling waist height PVC	Χ	Х	X	′
Cargo straps, lashing rails ¹⁵	X	X	X	X	Keys, two additional masters Lashing rails, floor-level (plus four anchors)	X	X	X	X		X	X	X	
Charging Package, dashboard Cigarette lighter & ash cup, front	X	X		X	Lashing rails, floor-level (plus four anchors) Lashing rails, waist-level	X	X	X	X		X	X	₽ X	
Coat hooks in driver cabin	Х	Х	Х	Х	Light/motion sensor in rear compartment	Х	Х	Х	Х	Warm/cool air duct to rear compartment	Χ	Х	X	(
 DEF fluid filler cap – lockable (Diesel models only) Door-mounted assist handle, driver & passenger^{††} 	X	X	X	X	Luxury interior trim Lockable storage compartment above windshield	X	X	X	X		Х	Х	X	
Door sill - protective edge**	X			X	Multifunction steering wheel	X								
XTERIOR	_	_		_		_	_	_	_	TIRES & WHEELS	_	_	_	
Black tinting (90%) for rear windows	X	X	X	X	Heated rear window(s) with washers/wipers	X	X	X	X		X	H	╀	
Bumper step, rear, Grey Bumper step, rear, spring-loaded	^	X		X	High roof (standard 3500 & all 170" and 170" ext wb) Mounting rails for roof rack	X	Х	X	X		X	Х	X	
Bumpers front/rear primed	Х	Х	Х	Х	Opening limiter, electrically operated sliding door	Х	Х	Х	Х	Rims painted Arctic White	Χ	Х	X	′
Deletion of "model" badge, right rear door	X	X	X	X	Painted metallic front & rear bumper	X	X	X	X	1	X	X		
Deletion of Sprinter badge, left rear door Elec. closing assist left sliding door (soft close)	X	X	X	X	Primed side moldings Sliding door, driver side	X	X	X	X	1	X	X		
Elec. closing assist right sliding door (soft close)	Х	Х	Х	Х	Sliding door, right-side deletion	Х	Х	Х	Х	Steel wheels: 8.5 J x16 Rr; 6.5 J x16 Fr (Super Single)		Χ	X	(
Electric sliding door right Electric sliding step	X	X	X	X	Sliding door, two-stage opening Stan wide at rear and	X	X	X	X		X	X	X	
Electric sliding step Electrically folding exterior mirrors	X	X	Ĺ	Ĺ	Step, wide, at rear end Trailer crossmember 7,500-lb. capacity ^{†††}	^	X	X	X		X		X	
Fixed window center left	X	X	X	X	Trailer hitch, 5,000 lbs. (Available only for 170" EXT on 3500, 3500XD & 4500 models)	Х	Х	х	x	Wheel chocks	Х	Х		
Fixed window center right Half-sided step rear (for trailer hitch)	X	X	X	X	Windows in rear doors	Х	Х	Х	Х	Wneel nouse covering	X	X	<u> x</u>	_
SAFETY & SECURITY					OPTIONAL PACKAGES					OPTIONAL PACKAGES (CONTINUED)				
Active Distance Assist DISTRONIC®5	Х	Х	Х	Х	Bench Seat Package	Х	Х	Х	Х	Heavy-Duty-Cargo Protection Package	Х	Х		
Blind Spot Assist ³	Х	Х	Х	Х	Cargo Convenience Package	Х	Х	Х	Х	Premium Package	Χ	Х	X	(
Emergency flashlight First-aid kit	X	X	X	X	Cargo Protection Package Chrome Grille Package	X	X	X	X		Х	X	X	
Fog lamp with cornering light function	X	X	X	X	Comfort Package	Х	X	X	X		Х	Х	X	(
r og ramp man cornering ngharametren													1	1
Parking Package Parking Package with 360° camera	X	X	Х	Х	Comfort Plus Package Driver Convenience Package	X	X	X	X		Χ	Χ	X	

SPRINTER CREW												B		
											4	-		
ADDITIONAL STANDARD FEATURES (CREW)			3500XD					3500XD					3500XD	
MECHANICAL	2500	3500	350	4500		2500	3500	350	4500		2500	3500	350	4500
Aux. fuel sending unit with fuel tap**	X	Х	X	X	Omission bulkhead	X	X	X	X		i i	Х	X	
Axle ratio 3.923**	Х				Stabilization Level I [†]	Х				Tire pressure monitoring lamp	Х			
Axle ratio 4.182 (standard on 2500 gas models only)†	X	X	X	X	Front axle reinforced	L	L		X	_				
SEATING														
Aisle-side armrest	X	X	X	X	 Three-seater bench in passenger compartment, first row (narrow); includes ISOFIX 	x	x	x	x	Wall-side armrest	Х	Х	x	X
INTERIOR														
Assist handle, B-pillar	Х	Х	X	Х	Rear window defroster	X	Х	X	Х		Х	Х	Х	X
Black tinting (90%) for rear windows	X	X	X		Roof trim	X	X	X	X		Х	Х	X	X
Cupholders, front Half height load compartment trim	X	X	X		Storage compartment with net in rear doors Warm/cool air duct to rear compartment	X					X	X	X	1 X
Half height load compartment trim Interior lights, cargo compartment	X	X	X		• warm/coor air duct to rear compartment] X	ΙX	X	ΙX	_				
EXTERIOR	1 //		1 7	1.^	TIRES & WHEELS									
2nd row, fixed window, driver side	X	X	X	Ιx	5.5 J x 16 steel wheels		X	X	X	1				
2nd row, fixed window, passenger side	T _X	x	x		6.5 J x 16 steel wheels	X	├^	╁	╁^	=				
3rd brake light	X	Х	Х	Х	Dual rear wheel tires		Х							
Full paneling, hinged rear doors	X	X	X		Spare wheel	X	X							
• High roof	X	X	X		Spare wheel bracket below frame The ATT (ATT (ATT PARTY)) The ATT (ATT PARTY) The ATT	X	X	X						
Laminated glass rear Rear doors, 180° opening	X	X	X		 Tires LT 215/85 R16 Tires LT 245/75 R16 	X	X	X	X	_				
Rear mudflaps	X	X	X		• Single tires	TX	\vdash	\vdash	\vdash	_				
Sliding door, passenger side	Х	Х	Х				_	_	_					
SAFETY & SECURITY														
Longitudinal member reinforcement	Τx	X	Τx	Ιx	Rearview camera (rearview mirror display)	Τx	Ιχ	Ιx	Τx	7				
MECHANICAL	2500					2500	3500	3500XD			2500	3500	3500XD	4500
Additional bar for driveshaft & exhaust extension	X	Х	X	X	Cruise control Cutoff relay for additional battery	X	X	X	X		X	H	H	╀
 Additional battery for retrofit consumers, co-driver seat base 	Х	Х	X	X	Deactivation lamp monitoring failure	X	X				X	Х	Х	X
Additional battery for retrofit consumers,	X	X	X	X	Electric parking brake	Х				Front engine bracket for additional alternator	Х	Х	Х	
engine compartment	_	_	╙	_	Engine oil level display at cold start**	X	X	X	X	· · · · · · · · · · · · · · · · · · ·	Х	X	X	X
Additional DIN-slots AGM battery 12V 95Ah 850A	X	X			 Front axle reinforced (standard on 4500 model)** Parametric Special Module (PSM) 	† X	X			Starter upgraded**	Х	Х	X	X
Asim battery 127 75411 0504 Axle ratio 3.923**	†^	X	T X		Rear spring vibration absorbers	X	LÂ	╁	╁	=				
Axle ratio 4.182 (standard on 2500 gas models)	Х				Speed limitation, 65 mph	Х	Х	X	X					
SEATING														
Artico Man-made Leather Black	Х	Х	X	Х	Heated driver seat	Х	Х	X	X	Heated front passenger seat	Х	Χ	Х	X
Fabric Caluma Black	Х	Х	X	X										
INTERIOR														
12V power outlet, rear compartment	X	Х	X		Heat insulation, front compartment	X	Х	X	X		Х	Х	Х	<u> </u>
• 115V socket	X	X			Heat insulation, rear compartment	X	X				Х	Х	Х	
Acoustic Package Assist handle, left rear door	X	X			Hinged lid for storage compartment Illuminated front exits	X	X				X	X		
Assist handle, right rear door	X	X			Instrument cluster with color display	T X	X				X	X	X	
Cargo straps, D-rings ¹⁵	Х	Х	X		Keys, two additional masters	Х	Х	X	X		Х	Χ	Х	
Charging Package, dashboard	Х	Х			Leather steering wheel	X	Х	Х	X		Х	Χ	X	
Cigarette lighter & ash cup, front Deer mounted assist handle, driver & passenger	X	X	X		Loadable wheel arch Multifunction stooring wheel	X	X	X	X	Plastic floor with six D-rings 15 plastic floor Cargo partition on C pillar.	X	Х	Х	×
Door-mounted assist handle, driver & passenger Fuel-fired heater booster (18,000 BTU)**	X	X			Multifunction steering wheel Navigation	X	X				X	Х	X	+
Fuel-fired pre-heater/booster (17,000 BTU)**	X	X	X		Optional 3-button keys	X	X				X		Ĺ	Ť
Half-sided step rear (for trailer hitch)	Х		Х		Overhead storage slot, front center	Х	Х				Х	Χ	Х)
EXTERIOR										TIRES & WHEELS				
Bumper step, rear, Grey	Х	Х	X	Ιx	Heated & electrically adjustable exterior mirrors	Х	Х	X	X		Х			T
Bumper step, rear, spring-loaded	Х	Х	Х	Х	Heated rear window(s) with washers/wipers	Х	Х	Х	Х	M+S winter tires	Х	Х		
Bumpers front/rear primed	Х	Х		X	Mounting rails for roof rack	Х	Х		Х		Х	Х		
DEF fluid filler cap – lockable Delation of "model" hadge vight year dear.	X	X		X	Opening limiter, electrically operated sliding door Deight of most all is front & year humans.	X	X				X	X		
Deletion of "model" badge, right rear door	X	Х	X	X	Painted metallic front & rear bumper	X	Х	X	X	Spare tire carrier deletion	Х	X	X	_ X

EXTERIOR										TIRES & WHEELS				
Bumper step, rear, Grey	Х	Х	Х	Х	Heated & electrically adjustable exterior mirrors	Χ	Х	Х	Х	Light-alloy wheels 6.5 J x 16	Х			
Bumper step, rear, spring-loaded	Χ	Х	Х	Х	Heated rear window(s) with washers/wipers	Χ	Χ	Х	Χ	M+S winter tires	Х	Χ	Х	Х
Bumpers front/rear primed	Χ	Х	Х	Х	Mounting rails for roof rack	Χ	Χ	Х	Χ	Rims painted Arctic White	Х	Χ	Х	Х
DEF fluid filler cap – lockable	Χ	Х	Х	Х	Opening limiter, electrically operated sliding door	Χ	Χ	Х	Χ	Rims painted Jet Black	Х	Х	Х	Х
Deletion of "model" badge, right rear door	Х	Х	Х	Х	Painted metallic front & rear bumper	Χ	Χ	Х	Х	Spare tire carrier deletion	Х	Х	Х	Х
Deletion of Sprinter badge, left rear door	Χ	Х	Х	X	Primed side moldings	Х	Χ	Х	Χ	Spare wheel deletion	Х	Х	Х	Х
Elec. closing assist right sliding door (soft close)	Х	Х	Х	X	Rear doors, opening to side-wall	Χ	Χ	Х	Χ	Tire Brand Continental	Х	Х	X	Х
Electric sliding door right	Χ	Х	Х	Х	Sliding door two-stage opening	Χ	Χ	Х	Х	Tire Brand Michelin	Х			
Electric sliding step	Χ	Х	X	X	Step, wide, at rear end [†]	Χ	Χ	X	Χ	Tire Brand Kumho	Х	Х	Х	Х
Electrically folding exterior mirrors	Х	Х			Trailer crossmember 7,500-lb. capacity		Χ	X	Х	Wheel chocks	Х	Х	Х	X
Electrically heated windshield	Х	Х	X	X	Trailer hitch, 5,000 lbs.	Х								

SAFETY & SECURITY					OPTIONAL PACKAGES				
 Active Distance Assist DISTRONIC^{®5} 	X	Х	Х	X	Chrome Grille Package	X	Х	Х	Х
Backup alarm	Х	Х	Х	Х	Comfort Package	Х	Х	Х	Х
Blind Spot Assist ³	Х	Х	Х	Х	Comfort Plus Package	Х	Х	Х	Х
Emergency flashlight	Х	Х	Х	X	Crew Van Comfort Package	Х	Х	Х	Х
First-aid kit	Х	Х	Х	Х	Driver Convenience Package	Х	Χ	Х	Х
Fog lamp with cornering light function	Х	Х	Х	X	Exterior Lighting Package	Х	Х	Х	Х
Misfueling prevention for diesel	Х	Х	Х	X	Premium Package	Х	Х	Х	Х
Parking Package	Х	Х	Х	Х	Premium Plus Package	Х	Х	Х	Х
Parking Package with 360° camera	Х	Х			Super Single Tires Package		Х	Х	
Security alarm with interior motion sensor	Х	Х	Х	Х	Swivel Seat Package	Х	Х	Х	Х

SPRINTER CARGO



TECHNICAL SPECIFICATIONS: 2500 & 3500

Tires					igle					Dual Rear Whee	3500	Super	r Single
Wheelbase		14	44"			70"	170'	EXT	144"	170"	170" EXT	170"	170" EXT
Engine	Diesel	Diesel	Diesel	Diesel	Gas/Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel
Drivetrain	4x2	4x4	4x2	4x4	4x2	4x4	4x2	4x4	4x2	4x2	4x2	4x2	4x2
Roof height		Standard Roo		High Roof	High Roof	High Roof	High Roof	High Roof	High Roof	High Roof	High Roof	High Roof	High Roof
Passenger capacity Rows of seats	2-3 One	2-3 One	2-3 One	2-3 One	2-3 One	2-3 One	2-3 One	2-3 One	2-3 One	2-3 One	2-3 One	2-3 One	2-3 One
EXTERIOR	Onc	One	One	Olic	One	Olic	Olic	Olic	0110	Olic	Olic	One	One
Length	593.2 cm	593.2 cm	593.2 cm	593.2 cm	696.7 cm	696.7 cm	736.7 cm	736.7 cm	593.2 cm	696.7 cm	736.7 cm	696.7 cm	736.7 cm
Length	(233.5") 244.6 cm	(233.5") 254.3 cm	(233.5") 273.0 cm	(233.5") 282.6 cm	(274.3") 272.5 cm	(274.3") 281.7 cm	(290.0") 271.8 cm	(290.0") 280.7 cm	(233.5") 277.1 cm	(274.3") 276.1 cm	(290.0") 275.3 cm	(274.3") 277.0 cm	(290.0") 276.2 cm
Height	(96.3")	(100.1")	(107.5")	(111.3")	(107.3")	(110.9")	(107.0")	(110.5")	(109.1")	(108.7")	(108.4")	(109.1")	(108.7")
Width – excluding mirrors	202.0 cm (79.5")	202.0 cm (79.5")	202.0 cm (79.5")	202.0 cm (79.5")	202.0 cm (79.5")	202.0 cm (79.5")	202.0 cm (79.5")	202.0 cm (79.5")	202.0 cm (79.5")	202.0 cm (79.5")	202.0 cm (79.5")	202.0 cm (79.5")	202.0 cm (79.5")
Width -	234.5 cm	234.5 cm	234.5 cm	234.5 cm	234.5 cm	234.5 cm	234.5 cm	234.5 cm	234.5 cm	234.5 cm	234.5 cm	234.5 cm	234.5 cm
including mirrors	(92.3") 170.6 cm	(92.3") 172.1 cm	(92.3") 170.6 cm	(92.3") 172.1 cm	(92.3") 170.6 cm	(92.3") 172.1 cm	(92.3") 170.6 cm	(92.3") 172.1 cm	(92.3") 168.9 cm	(92.3") 168.9 cm	(92.3") 168.9 cm	(92.3") 170.6 cm	(92.3") 170.6 cm
Tire track front	(67.2")	(67.8")	(67.2")	(67.8")	(67.2")	(67.8")	(67.2")	(67.8")	(66.5")	(66.5")	(66.5")	(67.2")	(67.2")
Tire track rear	173.2 cm (68.2")	173.2 cm (68.2")	173.2 cm (68.2")	173.2 cm (68.2")	173.2 cm (68.2")	173.2 cm (68.2")	173.2 cm (68.2")	173.2 cm (68.2")	154.2 cm (60.7")	154.2 cm (60.7")	154.2 cm (60.7")	165.6 cm (65.2")	165.6 cm (65.2")
Front overhang BA	102.1 cm	102.1 cm	102.1 cm	102.1 cm	102.1 cm	102.1 cm	102.1 cm	102.1 cm	102.1 cm	102.1 cm	102.1 cm	102.1 cm	102.1 cm
Rear overhang	(40.2")	(40.2")	(40.2")	(40.2")	(40.2")	(40.2")	(40.2")	(40.2")	(40.2")	(40.2")	(40.2")	(40.2")	(40.2")
(rear axle to end of frame)	124.6 cm (49.1")	124.6 cm (49.1")	124.6 cm (49.1")	124.6 cm (49.1")	162.1 cm (63.8")	162.1 cm (63.8")	202.1 cm (79.6")	202.1 cm (79.6")	124.6 cm (49.1")	162.1 cm (63.8")	202.1 cm (79.6")	162.1 cm (63.8")	202.1 cm (79.6")
or maniej			70.1 cm G		69.8 cm G								
Load height, unloaded (ground to cargo floor)	70.3 cm (27.7")	79.9 cm (31.5")	(27.6") 70.2 cm D	79.7 cm (31.4")	(27.5" G)	78.9 cm (31.1")	69.1 cm (27.2")	77.8 cm (30.6")	72.4 cm (28.5")	71.4 cm (28.1")	70.3 cm (27.7")	74.1 cm (29.2")	73.4 cm (28.9")
(ground to cargo noor)	(27.7)	(51.5)	(27.6")	(51.4)	69.7 cm D (27.4" D)	(51.1)	(27.2)	(30.0)	(20.5)	(20.1)	(27.7)	(27.2)	(20.7)
Landbataka landad	59.4 cm G (23.4" G)	(0.0	59.4 cm G (23.4" G)	(0.0	50.4	(0.1	50 ((0.1	500	500	50.4	(44	(4 (
Load height, loaded (ground to cargo floor)	59.3 cm D	(26.8")	59.3 cm D	68.0 cm (26.8")	59.4 cm (23.4")	68.1 cm (26.8")	59.6 cm (23.5")	68.1 cm (26.8")	59.0 cm (23.2")	59.0 cm (23.2")	59.1 cm (23.3")	64.1 cm (25.2")	64.6 cm (25.4")
	(23.3" D) 151.9 cm	151.9 cm	(23.3" D) 181.8 cm	181.8 cm	181.8 cm	181.8 cm	181.8 cm	181.8 cm	181.8 cm	181.8 cm	181.8 cm	181.8 cm	181.8 cm
Side-door opening height	(59.8")	(59.8")	(71.6")	(71.6")	(71.6")	(71.6")	(71.6")	(71.6")	(71.6")	(71.6")	(71.6")	(71.6")	(71.6")
Side-door opening width – sliding	129.6 cm (51.0")	129.6 cm (51.0")	129.6 cm (51.0")	129.6 cm (51.0")	126 cm (49.6")	126 cm (49.6")	126 cm (49.6")	129.6 cm (51.0")	129.6 cm (51.0")	129.6 cm (51.0")	129.6 cm (51.0")	129.6 cm (51.0")	129.6 cm (51.0")
Rear cargo door	155.0 cm	155.0 cm	184.6 cm	184.6 cm	184.6 cm	184.6 cm	184.6 cm	184.6 cm	184.6 cm	184.6 cm	184.6 cm	184.6 cm	184.6 cm
opening height Rear cargo door	(61.0") 155.5 cm	(61.0") 155.5 cm	(72.7") 155.5 cm	(72.7") 155.5 cm	(72.7") 155.5 cm	(72.7") 155.5 cm	(72.7") 155.5 cm	(72.7") 155.5 cm	(72.7") 155.5 cm	(72.7") 155.5 cm	(72.7") 155.5 cm	(72.7") 155.5 cm	(72.7") 155.5 cm
opening width	(61.2")	(61.2")	(61.2")	(61.2")	(61.2")	(61.2")	(61.2")	(61.2")	(61.2")	(61.2")	(61.2")	(61.2")	(61.2")
Turning radius (curb-to-curb)	12.4 m (40.7')	13.2 m (43.3')	12.4 m (40.7')	13.2 m (43.3')	14.4 m (47.2')	15.3 m (50.2')	14.4 m (47.2')	15.3 m (50.2')	13.8 m (45.3')	16.0 m (52.5')	16.0 m (52.5')	16.0 m (52.5')	16.0 m (52.5')
Ground to first	53.0 cm	62.9 cm	52.9 cm	62.7 cm	51.7 cm	61.5 cm	51.7 cm	61.3 cm	54.8 cm	53.2 cm	52.9 cm	52.5 cm	52.2 cm
step-side INTERIOR	(20.9")	(24.8")	(20.8")	(24.7")	(20.4")	(24.2")	(20.4")	(24.1")	(21.6")	(20.9")	(20.8")	(20.7")	(20.6")
	120.1 cm	120.1 cm	143.3 cm	143.3 cm	143.3 cm	143.3 cm	143.3 cm	143.3 cm	143.3 cm	143.3 cm	143.3 cm	143.3 cm	143.3 cm
Headroom (1st row)	(47.3")	(47.3")	(56.4")	(56.4")	(56.4")	(56.4")	(56.4")	(56.4")	(56.4")	(56.4")	(56.4")	(56.4")	(56.4")
Shoulder room (1st row)	171.3 cm (67.4")	171.3 cm (67.4")	171.3 cm (67.4")	1 71.3 cm (67.4")	171.3 cm (67.4")	171.3 cm (67.4")	171.3 cm (67.4")	1 71.3 cm (67.4")	171.3 cm (67.4")	171.3 cm (67.4")	1 71.3 cm (67.4")	171.3 cm (67.4")	171.3 cm (67.4")
Hip room (1st row)	161.7 cm	161.7 cm (63.7")	161.7 cm (63.7")	161.7 cm	161.7 cm (63.7")	161.7 cm (63.7")	161.7 cm (63.7")	161.7 cm	161.7 cm	161.7 cm (63.7")	161.7 cm (63.7")	161.7 cm	161.7 cm (63.7")
Legroom (1st row)	(63.7") 98.9 cm	98.9 cm	98.9 cm	(63.7") 98.9 cm	98.9 cm	98.9 cm	98.9 cm	(63.7") 98.9 cm	(63.7") 98.9 cm	98.9 cm	98.9 cm	(63.7") 98.9 cm	98.9 cm
	(38.9")	(38.9")	(38.9")	(38.9")	(38.9")	(38.9")	(38.9")	(38.9")	(38.9")	(38.9")	(38.9")	(38.9")	(38.9")
Cargo length, front (at floor)	337.5 cm (132.9")	337.5 cm (132.9")	337.5 cm (132.9")	337.5 cm (132.9")	441 cm (173.6")	441 cm (173.6")	481 cm (189.4")	481 cm (189.4")	337.5 cm (132.9")	441 cm (173.6")	481 cm (189.4")	441 cm (173.6")	481 cm (189.4")
Cargo length, front (at belt)	327.2 cm (128.8")	327.2 cm (128.8")	327.2 cm (128.8")	327.2 cm (128.8")	430.7 cm (169.6")	430.7 cm (169.6")	470.7 cm (185.3")	470.7 cm (185.3"	327.5 cm (128.9")	430.7 cm (169.6")	470.7 cm (185.3")	430.7 cm (169.6")	470.7 cm (185.3")
Cargo width between	135.0 cm	135.0 cm	135.0 cm	135.0 cm	135.0 cm	135.0 cm	135.0 cm	135.0 cm	97.8 cm	97.8 cm	97.8 cm	122.9 cm	122.9 cm
wheelhouses Cargo height, maximum	(53.1") 171.9 cm	(53.1") 171.9 cm	(53.1") 171.9 cm	(53.1") 171.9 cm	(53.1") 200.9 cm	(53.1") 200.9 cm	(53.1") 200.9 cm	(53.1") 200.9 cm	(38.5") 200.9 cm	(38.5") 200.9 cm	(38.5") 200.9 cm	(48.4") 200.9 cm	(48.4") 200.9 cm
(without trim)	(67.7")	(67.7")	(67.7")	(67.7")	(79.1")	(79.1")	(79.1")	(79.1")	(79.1")	(79.1")	(79.1")	(79.1")	(79.1")
Maximum floor width	178.7 cm (70.4")	178.7 cm (70.4")	178.7 cm (70.4")	178.7 cm (70.4")	178.7 cm (70.4")	178.7 cm (70.4")	178.7 cm (70.4")	178.7 cm (70.4")	178.7 cm (70.4")	178.7 cm (70.4")	178.7 cm (70.4")	178.7 cm (70.4")	178.7 cm (70.4")
Interior standing height	171.9 cm	171.9 cm	200.9 cm	200.9 cm	200.9 cm	200.9 cm	200.9 cm	200.9 cm	200.9 cm	200.9 cm	200.9 cm	200.9 cm	200.9 cm
	(67.7")	(67.7")	(79.1")	(79.1")	(79.1")	(79.1")	(79.1")	(79.1")	(79.1")	(79.1")	(79.1")	(79.1")	(79.1")
CARGO CAPACITY Cargo volume	9.0 cu. m.	9.0 cu. m.	10.6 cu. m.	10.6 cu. m.	13.8 cu. m.	13.8 cu. m.	15.1 cu. m.	15.1 cu. m.	9.3 cu. m.	12.2 cu. m.	13.3 cu. m.	13.3 cu. m.	14.5 cu. m.
(behind last row of seats)	(319.0 cu. ft.)	(319.0 cu. ft.)	(374.3 cu. ft.)	(374.3 cu. ft.)	(488.1 cu. ft.)	(488.1 cu. ft.)	(532.6 cu. ft.)	(532.6 cu. ft.)	(328.5 cu. ft.)	(430.1 cu. ft.)	(469.4 cu. ft.)	(469.2 cu. ft.)	(512.1 cu. ft.
Maximum roof load	300 kg (660 lbs.)	300 kg (660 lbs.)	150 kg (330 lbs.)	150 kg (330 lbs.)	150 kg (330 lbs.)	150 kg (330 lbs.)	150 kg (330 lbs.)	150 kg (330 lbs.)	150 kg (330 lbs.)	150 kg (330 lbs.)	150 kg (330 lbs.)	150 kg (330 lbs.)	150 kg (330 lbs.)
Maximum available	6,319 kg	6,319 kg	6,319 kg	6,319 kg	6,319 kg	6,319 kg	6,319 kg	6,319 kg	6,917 kg	6,917 kg	6,917 kg	6,917 kg	6,917 kg
GCWR MAXIMUM CAPABILITIES	(13,930 lbs.)	(13,930 lbs.)	(13,930 lbs.)	(13,930 lbs.)	(13,930 lbs.)	(13,930 lbs.)	(13,930 lbs.)	(13,930 lbs.)	(15,250 lbs.)	(15,250 lbs.)	(15,250 lbs.)	(15,250 lbs.)	(15,250 lbs
MAXIMUM CAPABILITIES	1,890 kg G		2,005 kg G		1,820 kg G								
Maximum payload	(4,167 lbs. G)	1,735 kg	(4,420 lbs. G)	1,690 kg	(4012 lbs. G)	1,550 kg	1,655 kg	1,505 kg	2,035 kg	1,875 kg	1,840 kg	1,875 kg	1,840 kg
	1,870 kg D (4,123 lbs. D)	(3,825 lbs.)	1,890 kg D (4,167 lbs. D)	(3,726 lbs.)	1,705 kg D (3,759 lbs. D)	(3,417 lbs.)	(3,649 lbs.)	(3,318 lbs.)	(4,488 lbs.)	(4,135 lbs.)	(4,058 lbs.)	(4,135 lbs.)	(4,058 lbs.
Maximum towing ¹⁶	2,268 kg	2,268 kg	2,268 kg	2,268 kg	2,268 kg	2,268 kg	2,268 kg	2,268 kg	3,402 kg	3,402 kg	3,402 kg	3,402 kg	3,402 kg
	(5,000 lbs.) 4,105 kg	(5,000 lbs.) 4,105 kg	(5,000 lbs.) 4,105 kg	(5,000 lbs.) 4,105 kg	(5,000 lbs.) 4,105 kg	(5,000 lbs.) 4,105 kg	(5,000 lbs.) 4,105 kg	(5,000 lbs.) 4,105 kg	(7,500 lbs.) 4,490 kg	(7,500 lbs.) 4,490 kg	(7,500 lbs.) 4,490 kg	(7,500 lbs.) 4,490 kg	(7,500 lbs. 4,490 kg
GVWR	(9,050 lbs.)	(9,050 lbs.)	(9,050 lbs.)	(9,050 lbs.)	(9,050 lbs.)	(9,050 lbs.)	(9,050 lbs.)	(9,050 lbs.)	(9,900 lbs.)	(9,900 lbs.)	(9,900 lbs.)	(9,900 lbs.)	(9,900 lbs.)
TWR (maximum loaded trailer weight ratings)	227 kg (500 lbs.)	227 kg (500 lbs.)	227 kg (500 lbs.)	227 kg (500 lbs.)	227 kg (500 lbs.)	227 kg (500 lbs.)	227 kg (500 lbs.)	227 kg (500 lbs.)	340 kg (750 lbs.)	340 kg (750 lbs.)	340 kg (750 lbs.)	340 kg (750 lbs.)	340 kg (750 lbs.)

SPRINTER CARGO

TECHNICAL SPECIFICATIONS: 3500XD CARGO & 4500

					350	0XD					4500						
Tires				Dual Rea	ar Wheel				Super	Single		Dual Rea	ar Wheel				
Wheelbase		14	4"		17	'0"	170"	EXT	170"	170" EXT	14	4"	170"	170" EXT			
Engine	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel			
Drivetrain	4x2	4x4	4x2	4x4	4x2	4x4	4x2	4x4	4x2	4x2	4x2	4x2	4x2	4x2			
Roof height	Standard Roof	Standard Roof	High Roof	Standard Roof	High Roof	High Roof	High Roof										
Passenger capacity	2-3	2-3	2-3	2-3	2-3	2-3	2-3	2-3	2-3	2-3	2-3	2-3	2-3	2-3			
Rows of seats	One	One	One	One	One	One	One	One	One	One	One	One	One	One			

EXTERIOR

Length	593.2 cm (233.5")	593.2 cm (233.5")	593.2 cm (233.5")	593.2 cm (233.5")	696.7 cm (274.3")	696.7 cm (274.3")	736.7 cm (290.0")	736.7 cm (290.0")	696.7 cm (274.3")	736.7 cm (290.0")	593.2 cm (233.5")	593.2 cm (233.5")	696.7 cm (274.3")	736.7 cm (290.0")
Height	248.7 cm (97.9")	254.2 cm (100.1")	277.0 cm (109.1")	282.5 cm (111.2")	276.1 cm (108.7")	281.8 cm (110.9")	275.3 cm (108.4")	280.9 cm (110.6")	277.0 cm (109.1")	276.2 cm (108.7")	248.4 cm (97.8")	276.7 cm (108.9")	275.7 cm (108.5")	274.8 cm (108.2")
Width – excluding mirrors	202.0 cm (79.5")	202.0 cm (79.5")	202.0 cm (79.5")											
Width – including mirrors	242.6 cm (95.5")	242.6 cm (95.5")	242.6 cm (95.5")											
Tire track front	168.9 cm (66.5")	169.6 cm (66.8")	170.6 cm (67.2")	170.6 cm (67.2")	167.7 cm (66.0")	167.7 cm (66.0")	167.7 cm (66.0")	167.7 cm (66.0")						
Tire track rear	154.2 cm (60.7")	165.6 cm (65.2")	165.6 cm (65.2")	154.2 cm (60.7")	154.2 cm (60.7")	154.2 cm (60.7")	154.2 cm (60.7")							
Front overhang BA	102.1 cm (40.2")	102.1 cm (40.2")	102.1 cm (40.2")											
Rear overhang (rear axle to end of frame)	124.6 cm (49.1")	124.6 cm (49.1")	124.6 cm (49.1")	124.6 cm (49.1")	162.1 cm (63.8")	162.1 cm (63.8")	202.1 cm (79.6")	202.1 cm (79.6")	162.1 cm (63.8")	202.1 cm (79.6")	124.6 cm (49.1")	124.6 cm (49.1")	162.1 cm (63.8")	202.1 cm (79.6")
Load height, unloaded (ground to cargo floor)	74.3 cm (29.3")	78.0 cm (30.7")	74.1 cm (29.2")	77.7 cm (30.6")	73.3 cm (28.9")	76.9 cm (30.3")	72.5 cm (28.5")	75.7 cm (29.8")	74.1 cm (29.2")	73.4 cm (28.9")	74.0 cm (29.1")	73.7 cm (29.0")	72.9 cm (28.7")	72.0 cm (28.3")
Load height, loaded (ground to cargo floor)	62.3 cm (24.5")	63.2 cm (24.9")	62.3 cm (24.5")	63.2 cm (24.9")	62.5 cm (24.6")	63.1 cm (24.8")	62.8 cm (24.7")	62.7 cm (24.7")	62.5 cm (24.6")	62.9 cm (24.8")	62.2 cm (24.5")	62.2 cm (24.5")	62.4 cm (24.6")	62.7 cm (24.7")
Side-door opening height	151.9 cm (59.8")	151.9 cm (59.8")	181.8 cm (71.6")	181.8 cm (71.6")	181.8 cm (71.6")	181.8 cm (71.6")	181.8 cm (71.6")	181.8 cm (71.6")	181.8 cm (71.6")	181.8 cm (71.6")	151.9 cm (59.8")	181.8 cm (71.6")	181.8 cm (71.6")	181.8 cm (71.6")
Side-door opening width – sliding	129.6 cm (51.0")	129.6 cm (51.0")	126 cm (49.6")	129.6 cm (51.0")	129.6 cm (51.0")	129.6 cm (51.0")	129.6 cm (51.0")	129.6 cm (51.0")	129.6 cm (51.0")	129.6 cm (51.0")				
Rear cargo door opening height	155.0 cm (61.0")	155.0 cm (61.0")	184.6 cm (72.7")	155.0 cm (61.0")	184.6 cm (72.7")	184.6 cm (72.7")	184.6 cm (72.7")							
Rear cargo door opening width	155.5 cm (61.2")	155.5 cm (61.2")	155.5 cm (61.2")											
Turning radius (curb-to-curb)	13.8 m (45.3')	13.2 m (43.3')	13.8 m (45.3')	13.2 m (43.3')	16.0 m (52.5')	15.3 m (50.2')	16.0 m (52.5')	15.3 m (50.2')	16.0 m (52.5')	16.0 m (52.5')	13.8 m (45.3')	13.8 m (45.3')	16.0 m (52.5')	16.0 m (52.5')
Ground to first step-side	55.0 cm (21.7")	63.1 cm (24.8")	54.8 cm (21.6")	62.9 cm (24.8")	53.2 cm (20.9")	61.8 cm (24.3")	52.9 cm (20.8")	61.7 cm (24.3")	52.8 cm (20.8")	52.5 cm (20.7")	55.4 cm (21.8")	55.3 cm (21.8")	53.8 cm (21.2")	53.5 cm (21.1")

ITERIOR

Headroom (1st row)	120.1 cm (47.3")	120.1 cm (47.3")	143.3 cm (56.4")	120.1 cm (47.3")	143.3 cm (56.4")	143.3 cm (56.4")	143.3 cm (56.4")							
Shoulder room (1st row)	171.3 cm (67.4")	171.3 cm (67.4")	171.3 cm (67.4")											
Hip room (1st row)	161.7 cm (63.7")													
Legroom (1st row)	98.9 cm (38.9")	98.9 cm (38.9")	98.9 cm (38.9")	98.9 cm (38.9")	98.9 cm (38.9")	98.9 cm (38.9")	98.9 cm (38.9")	98.9 cm (38.9")	98.9 cm (38.9")	98.9 cm (38.9")				
Cargo length, front (at floor)	337.5 cm (132.9")	337.5 cm (132.9")	337.5 cm (132.9")	337.5 cm (132.9")	441 cm (173.6")	441 cm (173.6")	481 cm (189.4")	481 cm (189.4")	441 cm (173.6")	481 cm (189.4")	337.5 cm (132.9")	337.5 cm (132.9")	441 cm (173.6")	481 cm (189.4")
Cargo length, front (at belt)	327.2 cm (128.8")	327.2 cm (128.8")	327.2 cm (128.8")	327.2 cm (128.8")	430.7 cm (169.9")	430.7 cm (169.9")	470.7 cm (185.3")	470.7 cm (185.3")	430.7 cm (169.9")	470.7 cm (185.3")	327.2 cm (128.8")	327.2 cm (128.8")	430.7 cm (169.9")	470.7 cm (185.3")
Cargo width between wheelhouses	97.8 cm (38.5")	122.9 cm (48.4")	122.9 cm (48.4")	97.8 cm (38.5")	97.8 cm (38.5")	97.8 cm (38.5")	97.8 cm (38.5")							
Cargo height, maximum (without trim)	171.9 cm (67.7")	171.9 cm (67.7")	171.9 cm (67.7")	171.9 cm (67.7")	200.9 cm (79.1")	200.9 cm (79.1")	200.9 cm (79.1")	200.9 cm (79.1")	200.9 cm (79.1")	200.9 cm (79.1")	171.9 cm (67.7")	171.9 cm (67.7")	200.9 cm (79.1")	200.9 cm (79.1")
Maximum floor width	178.7 cm (70.4")													
Interior standing height	171.9 cm (67.7")	171.9 cm (67.7")	200.9 cm (79.1")	171.9 cm (67.7")	200.9 cm (79.1")	200.9 cm (79.1")	200.9 cm (79.1")							

CARGO CAPACITY

Cargo volume	8.0 cu. m.	8.0 cu. m.	9.3 cu. m.	9.3 cu. m.	12.2 cu. m.	12.2 cu. m.	13.3 cu. m.	13.3 cu. m.	13.3 cu. m.	14.5 cu. m.	8.0 cu. m.	9.3 cu. m.	12.2 cu. m.	13.3 cu. m.
(behind last row of seats)	(281.1 cu. ft.)	(281.1 cu. ft.)	(328.5 cu. ft.)	(328.5 cu. ft.)	(430.1 cu. ft.)	(430.1 cu. ft.)	(469.4 cu. ft.)	(469.4 cu. ft.)	(469.2 cu. ft.)	(512.1 cu. ft.)	(281.1 cu. ft.)	(328.5 cu. ft.)	(430.1 cu. ft.)	(469.4 cu. ft.)
Maximum roof load	300 kg (660 lbs.)	300 kg (660 lbs.)	150 kg (330 lbs.)	300 kg (660 lbs.)	150 kg (330 lbs.)	150 kg (330 lbs.)	150 kg (330 lbs.)							
Maximum available GCWR	6,917 kg (15,250 lbs.)		6,917 kg (15,250 lbs.)	6,917 kg (15,250 lbs.)	6,917 kg (15,250 lbs.)									

MAXIMUM CAPABILITIES

Maximum payload	2,588 kg (5,706 lbs.)	2,458 kg (5,419 lbs.)	2,538 kg (5,595 lbs.)	2,413 kg (5,320 lbs.)	2,393 kg (5,276 lbs.)	2,258 kg (4,978 lbs.)	2,353 kg (5,188 lbs.)	2,223 kg (4,901 lbs.)	2,393 kg (5,276 lbs.)	2,353 kg (5,188 lbs.)	3,070 kg (6,768 lbs.)	3,015 kg (6,647 lbs.)	2,875 kg (6,338 lbs.)	2,840 kg (6,261 lbs.)
Maximum towing ¹⁶	3,402 kg (7,500 lbs.)	3,402 kg (7,500 lbs.)	3,402 kg (7,500 lbs.)	3,402 kg (7,500 lbs.)	3,402 kg (7,500 lbs.)	3,402 kg (7,500 lbs.)	2,268 kg (5,000 lbs.)	2,268 kg (5,000 lbs.)	3,402 kg (7,500 lbs.)	2,268 kg (5,000 lbs.)	3,402 kg (7,500 lbs.)	3,402 kg (7,500 lbs.)	3,402 kg (7,500 lbs.)	3,402 kg (7,500 lbs.)
GVWR	5,003 kg (11,030 lbs.)	5,500 kg (12,125 lbs.)												
TWR (maximum loaded trailer weight ratings)	340 kg (750 lbs.)	340 kg (750 lbs.)	340 kg (750 lbs.)	340 kg (750 lbs.)	340 kg (750 lbs.)	340 kg (750 lbs.)	340 kg (750 lbs.)	340 kg (750 lbs.)	340 kg (750 lbs.)	340 kg (750 lbs.)	340 kg (750 lbs.)	340 kg (750 lbs.)	340 kg (750 lbs.)	340 kg (750 lbs.)

SPRINTER CREW



		2	500		3	500	
Tires		Si	ngle		Dual R	ear Wheel	Super Single
Wheelbase	14	4"	17	70"	144"	170"	170"
Engines	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel
Drivetrain	4x2	4x4	4x2	4x4	4x2	4x2	4x2
Roof height	High Roof	High Roof	High Roof	High Roof	High Roof	High Roof	High Roof
Passenger capacity	5	5	5	5	5	5	5
Rows of seats	Two	Two	Two	Two	Two	Two	Two
EXTERIOR							
Length	593.2 cm (233.5")	593.2 cm (233.5")	696.7 cm (274.3")	696.7 cm (274.3")	593.2 cm (233.5")	696.7 cm (274.3")	696.7 cm (274.3")
Height	273.0 cm	282.6 cm	272.5 cm	282.6 cm	277.1 cm	276.1 cm	277.0 cm
icigiit	(107.5")	(111.3")	(107.3")	(111.3")	(109.1")	(108.7")	(109.1")
Width – excluding mirrors	202.0 cm (79.5")	202.0 cm (79.5")	202.0 cm (79.5")	202.0 cm (79.5")	202.0 cm (79.5")	202.0 cm (79.5")	202.0 cm (79.5")
Width - including mirrors	234.5 cm (92.3")	234.5 cm (92.3")	234.5 cm (92.3")	234.5 cm (92.3")	234.5 cm (92.3")	234.5 cm (92.3")	234.5 cm (92.3")
	170.6 cm	172.1 cm	170.6 cm	172.1 cm	168.9 cm	168.9 cm	170.6 cm
Fire track front	(67.2")	(67.8")	(67.2")	(67.8")	(66.5")	(66.5")	(67.2")
ire track rear	173.2 cm (68.2")	173.2 cm (68.2")	173.2 cm (68.2")	173.2 cm (68.2")	154.2 cm (60.7")	154.2 cm (60.7")	165.6 cm (65.2")
Front overhang BA	102.1 cm	102.1 cm	102.1 cm	102.1 cm	102.1 cm	102.1 cm	102.1 cm
Rear overhang	(40.2") 124.6 cm	(40.2") 124.6 cm	(40.2") 162.1 cm	(40.2") 162.1 cm	(40.2") 124.6 cm	(40.2") 162.1 cm	(40.2") 162.1 cm
rear axle to end of frame)	(49.1")	(49.1")	(63.8")	(63.8")	(49.1")	(63.8")	(63.8")
	69.7 cm G		69.3 cm G				
Load height, unloaded [ground to cargo floor]	(27.4" G) 70.2 cm D	79.7 cm (31.4")	(27.3" G) 69.7 cm D	78.9 cm (31.1")	72.4 cm (28.5")	71.4 cm (28.1")	71.4 cm (28.1")
	(27.6" D)	(* * * *)	(27.4" D)	(* * /	, , , ,	()	(, ,
Load height, loaded ground to cargo floor)	59.3 cm (23.3")	68.0 cm (26.8")	59.4 cm (23.4")	68.1 cm (26.8")	59.0 cm (23.2")	59.0 cm (23.2")	59.0 cm (23.2")
Side-door opening height	181.8 cm	181.8 cm	181.8 cm	181.8 cm	181.8 cm	181.8 cm	181.8 cm
	(71.6")	(71.6")	(71.6")	(71.6")	(71.6")	(71.6")	(71.6")
Side-door opening width - sliding	129.6 cm (51")	129.6 cm (51")	129.6 cm (51")	129.6 cm (51")	129.6 cm (51")	129.6 cm (51")	129.6 cm (51")
Rear cargo door opening neight	184.6 cm (72.7")	184.6 cm (72.7")	184.6 cm (72.7")	184.6 cm (72.7")	184.6 cm (72.7")	184.6 cm (72.7")	184.6 cm (72.7")
Rear cargo door opening	155.5 cm	155.5 cm	155.5 cm	155.5 cm	155.5 cm	155.5 cm	155.5 cm
width	(61.2")	(61.2")	(61.2")	(61.2")	(61.2")	(61.2")	(61.2")
Furning radius (curb-to- curb)	12.4 m (40.7')	13.2 m (43.3')	14.4 m (47.2')	15.3 m (50.2')	13.8 m (45.3')	16.0 m (52.5')	16.0 m (52.5')
Ground to first step-side	52.9 cm (20.8")	62.7 cm (24.7")	51.7 cm (20.4")	61.5 cm (24.2")	54.8 cm (21.6")	53.2 cm (20.9")	53.2 cm (20.9")
NTERIOR	(20.0)	(2)	(2011)	(2112)	(2.10)	(2017)	(20.7)
deedween (1et veu)	143.3 cm	143.3 cm	143.3 cm	143.3 cm	143.3 cm	143.3 cm	143.3 cm
Headroom (1st row)	(56.4")	(56.4")	(56.4")	(56.4")	(56.4")	(56.4")	(56.4")
Shoulder room (1st row)	1 71.3 cm (67.4")	1 71.3 cm (67.4")	1 71.3 cm (67.4")	171.3 cm (67.4")	171.3 cm (67.4")	171.3 cm (67.4")	171.3 cm (67.4")
Hip room (1st row)	161.7 cm	161.7 cm	161.7 cm	161.7 cm	161.7 cm	161.7 cm	161.7 cm
	(63.7") 98.9 cm	(63.7") 98.9 cm	(63.7") 98.9 cm	(63.7") 98.9 cm	(63.7") 98.9 cm	(63.7") 98.9 cm	(63.7") 98.9 cm
-egroom (1st row)	(38.9")	(38.9")	(38.9")	(38.9")	(38.9")	(38.9")	(38.9")
Cargo length, front (at floor)	262.9 cm (103.5")	262.9 cm (103.5")	366.4 cm (144.3")	366.4 cm (144.3")	262.9 cm (103.5")	366.4 cm (144.3")	366.4 cm (144.3")
Cargo length, front (at belt)	236.6 cm	236.6 cm	340.1 cm	340.1 cm	236.6 cm	340.1 cm	340.1 cm
0 0 , , , ,	(93.1")	(93.1")	(133.9")	(133.9")	(93.1")	(133.9")	(133.9")
Cargo width between wheelhouses	135.0 cm (53.1")	135.0 cm (53.1")	135.0 cm (53.1")	135.0 cm (53.1")	97.8 cm (38.5")	97.8 cm (38.5")	122.9 cm (48.4")
Cargo height, maximum	191.8 cm	191.8 cm	191.8 cm	191.8 cm	191.8 cm	191.8 cm	191.8 cm
(with trim)	(75.5") 178.7 cm	(75.5") 178.7 cm	(75.5") 178.7 cm	(75.5") 178.7 cm	(75.5") 178.7 cm	(75.5") 178.7 cm	(75.5") 178.7 cm
Maximum floor width	(70.4")	(70.4")	(70.4")	(70.4")	(70.4")	(70.4")	(70.4")
nterior standing height	194.9 cm (76.7")	194.9 cm (76.7")	194.9 cm (76.7")	194.9 cm (76.7")	194.9 cm (76.7")	194.9 cm (76.7")	194.9 cm (76.7")
CARGO CAPACITY							
Cargo volume	7.4 cu. m.	7.4 cu. m.	10.5 cu. m.	10.5 cu. m.	7.4 cu. m.	10.5 cu. m.	10.5 cu. m.
behind last row of seats)	(261.3 cu. ft.) 150 kg	(261.3 cu. ft.) 150 kg	(370.8 cu. ft.) 150 kg	(370.8 cu. ft.) 150 kg	(261.3 cu. ft.) 150 kg	(370.8 cu. ft.) 150 kg	(370.8 cu. ft.) 150 kg
Maximum roof load	(330 lbs.)	(330 lbs.)	(330 lbs.)	(330 lbs.)	(330 lbs.)	(330 lbs.)	(330 lbs.)
Maximum available GCWR	6,319 kg (13,930 lb)	6,319 kg (13,930 lb)	6,319 kg (13,930 lb)	6,319 kg (13,930 lb)	6,917 kg (15,250 lb)	6,917 kg (15,250 lb)	6,917 kg (15,250 lb)
MAXIMUM CAPABILITIES	(,. 50 10)	(12,700 10)	(.2,700.10)	(.2,, 55 15)	(,200.0)	(,200 10)	(.5,255.5)
	1,675 kg	1,520 kg	1,510 kg	1,360 kg	1,860 kg	1,685 kg	1,685 kg
Maximum payload	(3,693 lbs)	(3,351 lbs.)	(3,329 lbs)	(2,998 lbs.)	(4,102 lbs.)	(3,716 lbs.)	(3,716 lbs.)
Maximum towing ¹⁶	2,268 kg (5,000 lbs)	2,268 kg (5,000 lbs.)	2,268 kg (5,000 lbs.)	2,268 kg (5,000 lbs.)	3,402 kg (7,500 lbs.)	3,402 kg (7,500 lbs.)	3,402 kg (7,500 lbs.)
CV/WP	4,105 kg	4,105 kg	4,105 kg	4,105 kg	4,490 kg	4,490 kg	4,490 kg
GVWR	(9,050 lbs.)	(9,050 lbs.)	(9,050 lbs.)	(9,050 lbs.)	(9,900 lbs.)	(9,900 lbs.)	(9,900 lbs.)

SPRINTER CREW



			3500XD			450	00
Tires		Dual F	Rear Wheel		Super Single	Dual Rea	
Wheelbase		44"		70"	170"	144"	170"
Engines	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel	Diesel
Drivetrain	4x2	4x4	4x2	4x4	4x2	4x2	4x2
Roof height	High Roof	High Roof	High Roof	High Roof	High Roof	High Roof	High Roof
Passenger capacity	5	5	5	5	5	5	5
Rows of seats	Two	Two	Two	Two	Two	Two	Two
EXTERIOR							
ength.	593.2 cm (233.5")	593.2 cm (233.5")	696.7 cm (274.3")	696.7 cm (274.3")	696.7 cm (274.3")	593.2 cm (233.5")	696.7 cm (274.3")
leight	277.0 cm (109.1")	282.5 cm (111.2")	276.1 cm (108.7")	281.8 cm (110.9")	277.0 cm (109.1")	276.7 cm (108.9")	275.7 cm (108.5")
Vidth – excluding mirrors	202.0 cm (79.5")	202.0 cm (79.5")	202.0 cm (79.5")	202.0 cm (79.5")	202.0 cm (79.5")	202.0 cm (79.5")	202.0 cm (79.5")
Vidth – including mirrors	242.6 cm (95.5")	242.6 cm (95.5")	242.6 cm (95.5")	242.6 cm (95.5")	242.6 cm (95.5")	242.6 cm (95.5")	242.6 cm (95.5")
Fire track front	168.9 cm (66.5")	169.6 cm (66.8")	168.9 cm (66.5")	169.6 cm (66.8")	170.6 cm (67.2")	167.7 cm (66.0")	167.7 cm (66.0")
Fire track rear	154.2 cm	154.2 cm	154.2 cm	154.2 cm	165.6 cm	154.2 cm	154.2 cm
Front overhang BA	(60.7") 102.1 cm	(60.7") 102.1 cm	(60.7") 102.1 cm	(60.7") 102.1 cm	(65.2") 102.1 cm	(60.7") 102.1 cm	(60.7") 102.1 cm
	(40.2") 124.6 cm	(40.2") 124.6 cm	(40.2") 162.1 cm	(40.2") 162.1 cm	(40.2") 162.1 cm	(40.2") 124.6 cm	(40.2") 162.1 cm
Rear overhang rear axle to end of frame)	(49.1")	(49.1")	(63.8")	(63.8")	(63.8")	(49.1")	(63.8")
oad height, unloaded ground to cargo floor)	74.1 cm (29.2")	77.7 cm (30.6")	73.3 cm (28.9")	76.9 cm (30.3")	73.3 cm (28.9")	73.7 cm (29.0")	72.9 cm (28.7")
oad height, loaded ground to cargo floor)	62.3 cm (24.5")	63.2 cm (24.9")	62.5 cm (24.6")	63.1 cm (24.8")	62.5 cm (24.6")	62.2 cm (24.5")	62.4 cm (24.6")
Side-door opening height	181.8 cm (71.6")	181.8 cm (71.6")	181.8 cm (71.6")	181.8 cm (71.6")	181.8 cm (71.6")	181.8 cm (71.6")	181.8 cm (71.6")
Side-door opening width – sliding	129.6 cm (51.0")	129.6 cm (51.0")	129.6 cm (51.0")	129.6 cm (51.0")	129.6 cm (51.0")	129.6 cm (51.0")	129.6 cm (51.0")
Rear cargo door opening height	184.6 cm (72.7")	184.6 cm (72.7")	184.6 cm (72.7")	184.6 cm (72.7")	184.6 cm (72.7")	184.6 cm (72.7")	184.6 cm (72.7")
Rear cargo door opening width	155.5 cm (61.2")	155.5 cm (61.2")	155.5 cm (61.2")	155.5 cm (61.2")	155.5 cm (61.2")	155.5 cm (61.2")	155.5 cm (61.2")
Turning radius (curb-to-curb)	13.8 m (45.3')	13.2 m (43.3')	16.0 m (52.5')	15.3 m (50.2')	16.0 m (52.5')	13.8 m (45.3')	16.0 m (52.5')
Ground to first step – side	54.8 cm (21.6")	53.2 cm (20.9")	54.8 cm (21.6")	52.9 cm (20.8")	52.9 cm (20.8")	52.9 cm (20.8")	52.9 cm (20.8")
NTERIOR	(21.0)	(20.7)	(25)	(20.0)	(20.0)	(20.0)	(20.0)
Headroom (1st row)	143.3 cm	143.3 cm	143.3 cm	143.3 cm	143.3 cm	143.3 cm	143.3 cm
	(56.4") 171.3 cm	(56.4") 171.3 cm	(56.4") 171.3 cm	(56.4") 171.3 cm	(56.4") 171.3 cm	(56.4") 171.3 cm	(56.4") 171.3 cm
Shoulder room (1st row)	(67.4") 161.7 cm	(67.4")	(67.4")	(67.4")	(67.4")	(67.4") 161.7 cm	(67.4")
lip room (1st row)	(63.7")	(63.7")	(63.7")	(63.7")	(63.7")	(63.7")	(63.7")
.egroom (1st row)	98.9 cm (38.9")	98.9 cm (38.9")	98.9 cm (38.9")	98.9 cm (38.9")	98.9 cm (38.9")	98.9 cm (38.9")	98.9 cm (38.9")
Cargo length, front (at floor)	262.9 cm (103.5")	262.9 cm (103.5")	366.4 cm (144.3")	366.4 cm (144.3")	366.4 cm (144.3")	262.9 cm (103.5")	262.9 cm (103.5")
Cargo length, front (at belt)	236.6 cm (93.1")	236.6 cm (93.1")	340.1 cm (133.9")	340.1 cm (133.9")	340.1 cm (133.9")	236.6 cm (93.1")	340.1 cm (133.9")
Cargo width between wheelhouses	97.8 cm (38.5")	97.8 cm (38.5")	97.8 cm (38.5")	97.8 cm (38.5")	122.9 cm (48.4")	97.8 cm (38.5")	97.8 cm (38.5")
Cargo height, maximum with trim)	191.8 cm (75.5")	191.8 cm (75.5")	191.8 cm (75.5")	191.8 cm (75.5")	191.8 cmv (75.5")	191.8 cm (75.5")	191.8 cm (75.5")
Maximum floor width	178.7 cm (70.4")	178.7 cm (70.4")	178.7 cm (70.4")	178.7 cm (70.4")	178.7 cm (70.4")	178.7 cm (70.4")	178.7 cm (70.4")
nterior standing height	194.9 cm (76.7")	194.9 cm (76.7")	194.9 cm (76.7")	194.9 cm (76.7")	194.9 cm (76.7")	194.9 cm (76.7")	194.9 cm (76.7")
CARGO CAPACITY	,	,	,	,		. ,	, , ,
Cargo volume	7.4 cu. m.	7.4 cu. m.	10.5 cu. m.	10.5 cu. m.	10.5 cu. m.	7.4 cu. m.	10.5 cu. m.
behind last row of seats)	(261.3 cu. ft.) 150 kg	(261.3 cu. ft.) 150 kg	(370.8 cu. ft.) 150 kg	(370.8 cu. ft.) 150 kg	(370.8 cu. ft.) 150 kg	(261.3 cu. ft.) 150 kg	(370.8 cu. ft.) 150 kg
Maximum roof load	(330 lbs.) 6,917 kg	(330 lbs.) 6,917 kg	(330 lbs.) 6,917 kg	(330 lbs.) 6,917 kg	(330 lbs.) 6,917 kg	(330 lbs.) 6,917 kg	(330 lbs.) 6,917 kg
Maximum available GCWR	(15,250 lbs.)	(15,250 lbs.)	(15,250 lbs.)	(15,250 lbs.)	(15,250 lbs.)	(15,250 lbs.)	(15,250 lbs.)
MAXIMUM CAPABILITIES	0.0701	2.2401	2.0001	20/21	2.0001	2.0/2.1	0.4051
Maximum payload	2,378 kg (5,243 lbs.)	2,243 kg (4,945 lbs.)	2,203 kg (4,857 lbs)	2,068 kg (4,559 lbs)	2,203 kg (4,857 lbs)	2,860 kg (6,305 lbs)	2,685 kg (5,919 lbs)
Maximum towing ¹⁶	3,402 kg (7,500 lbs)	3,402 kg (7,500 lbs)	3,402 kg (7,500 lbs)	3,402 kg (7,500 lbs)	3,402 kg (7,500 lbs)	3,402 kg (7,500 lbs)	3,402 kg (7,500 lbs)
GVWR	5,003 kg (11,030 lbs.)	5,003 kg (11,030 lbs.)	5,003 kg (11,030 lbs.)	5,003 kg (11,030 lbs.)	5,003 kg (11,030 lbs.)	5,500 kg (12,125 lbs.)	5,500 kg (12,125 lbs.)

SPRINTER PASSENGER



ADDITIONAL STANDARD FEATURES (PASSENGER 2500)

MECHANICAL	-	
Additional bar for driveshaft & exhaust extension	Front axle reinforced (standard on 2500 170" WB models only) ^{†/**}	Suspension for comfort & load protection
Axle ratio 3.923	Rear spring vibration absorbers	Tire pressure monitoring lamp
Axle ratio 4.182	Stabilization Level I [†]	
SEATING		
Aisle-side armrest	Storage net, passenger seat backrest	Wall-side armrest
Four-seater bench in passenger compartment, third row**	Three-seater bench in passenger compartment, first row (narrow); includes ISOFIX	Window pillar trim
Four-seater bench in passenger compartment, fourth row***	Three-seater bench in passenger compartment, second row (narrow); includes ISOFIX	Storage net, driver seat backrest
Luxury interior trim with USB-sockets	Three-seater bench in passenger compartment, third row (narrow); includes ISOFIX***	
INTERIOR		
12V power outlet, rear compartment	Front-to-rear outlet in instrument panel	Rear window defroster
Air conditioning rear, roof-mounted	Fuel-fired heater booster (18,000 BTU)	Sliding door, passenger side
Assist handle, B-pillar	Heat insulation, front compartment	Storage compartment with net in rear doors
Audio systems speakers, 5 front, 8 rear	Heat insulation, rear compartment	 Warm/cool air duct to rear compartment
Coat hooks in passenger compartment	Hinged lid for storage compartment	Weight optimized plastic floor
Cupholders, Front	Illuminated front exits	Window pillar trim
FMVSS 217 emergency exit	Rear cabin heater & vents	
EXTERIOR		TIRES & WHEELS
2nd row, fixed window, passenger side	High roof	6.5 J x 16 steel wheels
3rd brake light	Laminated glass rear	Spare wheel
Black tinting (90%) for rear windows	Rear Doors 180° opening	Spare wheel bracket below frame
Fixed window, center left***	Rear mudflaps	Tires LT 245/75 R16
Fixed window, center right***	Roof trim	Wheel house covering
Fixed window, rear left	Tow hook rear	
Fixed window, rear right	Windows in rear doors	
SAFETY & SECURITY		
Longitudinal member reinforcement	Rearview camera (rearview mirror display)	

Fixed window, rear left	Tow hook rear	
Fixed window, rear right	Windows in rear doors	
SAFETY & SECURITY		
Longitudinal member reinforcement	Rearview camera (rearview mirror display)	
OPTIONAL FEATURES (PASSENGER 2500)		
MECHANICAL	-	
Additional battery for retrofit consumers, co-driver seat base	Cutoff relay for additional battery	Fuel gauge, optimized for aux. fuel tap
Additional DIN-slots	Deactivation lamp monitoring failure	Misfueling prevention for diesel
Axle ratio 4.182	Electric parking brake	Parametric Special Module (PSM)
Cruise control	Engine oil level display at cold start	Speed limitation, 65 mph
Front engine bracket for additional alternator	Front engine bracket for auxiliary A/C compressor	Top speed limitation, 75 mph
SEATING		
Artico Man-made Leather Black	Heated driver seat	
Fabric Caluma Black	Heated front passenger seat	
INTERIOR		
115V socket	Electrically heated windshield	Rear doors, opening to side-wall
Acoustic Package	Fuel-fired pre-heater/booster (17,000 BTU)	Rear heater prep
Assist handle, left rear door	Instrument cluster with color display	THERMOTRONIC automatic climate control
Assist handle, right rear door	Keys, two additional masters	Tray for smartphones incl. wireless charging
Charging Package, dashboard	Leather steering wheel	Navigation
Cigarette lighter & ash cup, front	Multifunction steering wheel	Sirius Satellite Radio
Door-mounted assist handle, driver & passenger (standard on 4x4)	Optional 3-button keys	Lockable storage compartment above windshield
Electrically folding exterior mirrors	Overhead storage slot, front center	
FXTERIOR		TIRES & WHEELS
EXTERIOR	Mounting rails for roof rack	TIRES & WHEELS
Bumpers front/rear primed	Mounting rails for roof rack Opening limiter, electrically operated sliding door.	Light-alloy wheels 6.5 J x 16
Bumpers front/rear primed Bumper step, rear, Grey	Opening limiter, electrically operated sliding door	Light-alloy wheels 6.5 J x 16 M+S winter tires
Bumpers front/rear primed Bumper step, rear, Grey DEF fluid filler cap - lockable	Opening limiter, electrically operated sliding door Painted metallic front & rear bumper	Light-alloy wheels 6.5 J x 16 M+S winter tires Rims painted Arctic White
Bumpers front/rear primed Bumper step, rear, Grey DEF fluid filler cap – lockable Deletion of "model" badge, right rear door	Opening limiter, electrically operated sliding door Painted metallic front & rear bumper Primed side moldings	Light-alloy wheels 6.5 J x 16 M+S winter tires Rims painted Arctic White Rims painted Jet Black
Bumpers front/rear primed Bumper step, rear, Grey DEF fluid filler cap - lockable Deletion of "model" badge, right rear door Deletion of Sprinter badge, left rear door	Opening limiter, electrically operated sliding door Painted metallic front & rear bumper Primed side moldings Sliding door two-stage opening	Light-alloy wheels 6.5 J x 16 M+S winter tires Rims painted Arctic White Rims painted Jet Black Spare tire carrier deletion
Bumpers front/rear primed Bumper step, rear, Grey DEF fluid filler cap - lockable Deletion of "model" badge, right rear door Deletion of Sprinter badge, left rear door Elec. closing assist right sliding door (soft close)	Opening limiter, electrically operated sliding door Painted metallic front & rear bumper Primed side moldings	Light-alloy wheels 6.5 J x 16 M+S winter tires Rims painted Arctic White Rims painted Jet Black Spare tire carrier deletion Spare wheel deletion
Bumpers front/rear primed Bumper step, rear, Grey DEF fluid filler cap - lockable Deletion of "model" badge, right rear door Deletion of Sprinter badge, left rear door Elec. closing assist right sliding door (soft close) Half-sided step rear (for trailer hitch)**	Opening limiter, electrically operated sliding door Painted metallic front & rear bumper Primed side moldings Sliding door two-stage opening	Light-alloy wheels 6.5 J x 16 M+S winter tires Rims painted Arctic White Rims painted Jet Black Spare tire carrier deletion Spare wheel deletion Tire Brand Continental
Bumpers front/rear primed Bumper step, rear, Grey DEF fluid filler cap - lockable Deletion of "model" badge, right rear door Deletion of Sprinter badge, left rear door Elec. closing assist right sliding door (soft close)	Opening limiter, electrically operated sliding door Painted metallic front & rear bumper Primed side moldings Sliding door two-stage opening	Light-alloy wheels 6.5 J x 16 M+S winter tires Rims painted Arctic White Rims painted Jet Black Spare tire carrier deletion Spare wheel deletion
Bumpers front/rear primed Bumper step, rear, Grey DEF fluid filler cap - lockable Deletion of "model" badge, right rear door Deletion of Sprinter badge, left rear door Elec. closing assist right sliding door (soft close) Half-sided step rear (for trailer hitch)** Heated & electrically adjustable exterior mirrors Heated rear window(s) with washers/wipers	Opening limiter, electrically operated sliding door Painted metallic front & rear bumper Primed side moldings Sliding door two-stage opening	Light-alloy wheels 6.5 J x 16 M+S winter tires Rims painted Arctic White Rims painted Jet Black Spare tire carrier deletion Spare wheel deletion Tire Brand Continental Tire Brand Kumho
Bumpers front/rear primed Bumper step, rear, Grey DEF fluid filler cap - lockable Deletion of "model" badge, right rear door Deletion of Sprinter badge, left rear door Elec. closing assist right sliding door (soft close) Half-sided step rear (for trailer hitch)** Heated & electrically adjustable exterior mirrors Heated rear window(s) with washers/wipers SAFETY & SECURITY	Opening limiter, electrically operated sliding door Painted metallic front & rear bumper Primed side moldings Sliding door two-stage opening Trailer hitch, 5,000 lbs.**	Light-alloy wheels 6.5 J x 16 M+S winter tires Rims painted Arctic White Rims painted Jet Black Spare tire carrier deletion Spare wheel deletion Tire Brand Continental Tire Brand Mumho Tire Brand Michelin
Bumpers front/rear primed Bumper step, rear, Grey DEF fluid filler cap - lockable Deletion of "model" badge, right rear door Deletion of Sprinter badge, left rear door Elec. closing assist right sliding door (soft close) Half-sided step rear (for trailer hitch)** Heated & electrically adjustable exterior mirrors Heated rear window(s) with washers/wipers SAFETY & SECURITY Backup alarm	Opening limiter, electrically operated sliding door Painted metallic front & rear bumper Primed side moldings Sliding door two-stage opening	Light-alloy wheels 6.5 J x 16 M+S winter tires Rims painted Arctic White Rims painted Jet Black Spare tire carrier deletion Spare wheel deletion Tire Brand Continental Tire Brand Michelin Parking Package
Bumpers front/rear primed Bumper step, rear, Grey DEF fluid filler cap - lockable Deletion of "model" badge, right rear door Deletion of Sprinter badge, left rear door Elec. closing assist right sliding door (soft close) Half-sided step rear (for trailer hitch)** Heated & electrically adjustable exterior mirrors Heated rear window(s) with washers/wipers SAFETY & SECURITY	Opening limiter, electrically operated sliding door Painted metallic front & rear bumper Primed side moldings Sliding door two-stage opening Trailer hitch, 5,000 lbs.** Emergency flashlight	Light-alloy wheels 6.5 J x 16 M+S winter tires Rims painted Arctic White Rims painted Jet Black Spare tire carrier deletion Spare wheel deletion Tire Brand Continental Tire Brand Mumho Tire Brand Michelin
Bumpers front/rear primed Bumper step, rear, Grey DEF fluid filler cap - lockable Deletion of "model" badge, right rear door Deletion of Sprinter badge, left rear door Elec. closing assist right sliding door (soft close) Half-sided step rear (for trailer hitch)** Heated & electrically adjustable exterior mirrors Heated rear window(s) with washers/wipers SAFETY & SECURITY Backup alarm Blind Spot Assist Active Distance Assist DISTRONIC®5	Opening limiter, electrically operated sliding door Painted metallic front & rear bumper Primed side moldings Sliding door two-stage opening Trailer hitch, 5,000 lbs.** Emergency flashlight First-aid kit	Light-alloy wheels 6.5 J x 16 M+S winter tires Rims painted Arctic White Rims painted Jet Black Spare tire carrier deletion Spare wheel deletion Tire Brand Continental Tire Brand Michelin Parking Package Parking Package
Bumpers front/rear primed Bumper step, rear, Grey DEF fluid filler cap - lockable Deletion of "model" badge, right rear door Deletion of Sprinter badge, left rear door Elec. closing assist right sliding door (soft close) Half-sided step rear (for trailer hitch)** Heated & electrically adjustable exterior mirrors Heated rear window(s) with washers/wipers SAFETY & SECURITY Backup alarm Blind Spot Assist Active Distance Assist DISTRONIC®5	Opening limiter, electrically operated sliding door Painted metallic front & rear bumper Primed side moldings Sliding door two-stage opening Trailer hitch, 5,000 lbs.** Emergency flashlight First-aid kit Fog lamp with cornering light function	Light-alloy wheels 6.5 J x 16 M+S winter tires Rims painted Arctic White Rims painted Jet Black Spare tire carrier deletion Spare wheel deletion Tire Brand Continental Tire Brand Kumho Tire Brand Michelin Parking Package Parking Package Security alarm with interior motion sensor*
Bumpers front/rear primed Bumper step, rear, Grey DEF fluid filler cap - lockable Deletion of "model" badge, right rear door Deletion of Sprinter badge, left rear door Elec. closing assist right sliding door (soft close) Half-sided step rear (for trailer hitch)** Heated & electrically adjustable exterior mirrors Heated rear window(s) with washers/wipers SAFETY & SECURITY Backup alarm Blind Spot Assist Active Distance Assist DISTRONIC®5 OPTIONAL PACKAGES Chrome Grille Package	Opening limiter, electrically operated sliding door Painted metallic front & rear bumper Primed side moldings Sliding door two-stage opening Trailer hitch, 5,000 lbs.** Emergency flashlight First-aid kit Fog lamp with cornering light function Passenger Accessibility Package	Light-alloy wheels 6.5 J x 16 M+S winter tires Rims painted Arctic White Rims painted Jet Black Spare tire carrier deletion Spare wheel deletion Tire Brand Continental Tire Brand Michelin Parking Package Parking Package
Bumpers front/rear primed Bumper step, rear, Grey DEF fluid filler cap - lockable Deletion of "model" badge, right rear door Deletion of Sprinter badge, left rear door Elec. closing assist right sliding door (soft close) Half-sided step rear (for trailer hitch)** Heated & electrically adjustable exterior mirrors Heated rear window(s) with washers/wipers SAFETY & SECURITY Backup alarm Blind Spot Assist Active Distance Assist DISTRONIC®5 OPTIONAL PACKAGES Comfort Package Comfort Package	Opening limiter, electrically operated sliding door Painted metallic front & rear bumper Primed side moldings Sliding door two-stage opening Trailer hitch, 5,000 lbs.** Emergency flashlight First-aid kit Fog lamp with cornering light function Passenger Accessibility Package Premium Package	Light-alloy wheels 6.5 J x 16 M+S winter tires Rims painted Arctic White Rims painted Jet Black Spare tire carrier deletion Spare wheel deletion Tire Brand Continental Tire Brand Michelin Parking Package Parking Package with 360° camera Security alarm with interior motion sensor*
Bumpers front/rear primed Bumper step, rear, Grey DEF fluid filler cap - lockable Deletion of "model" badge, right rear door Deletion of Sprinter badge, left rear door Elec. closing assist right sliding door (soft close) Half-sided step rear (for trailer hitch)** Heated & electrically adjustable exterior mirrors Heated rear window(s) with washers/wipers SAFETY & SECURITY Backup alarm Blind Spot Assist Active Distance Assist DISTRONIC®5 OPTIONAL PACKAGES Chrome Grille Package	Opening limiter, electrically operated sliding door Painted metallic front & rear bumper Primed side moldings Sliding door two-stage opening Trailer hitch, 5,000 lbs.** Emergency flashlight First-aid kit Fog lamp with cornering light function Passenger Accessibility Package	Light-alloy wheels 6.5 J x 16 M+S winter tires Rims painted Arctic White Rims painted Jet Black Spare tire carrier deletion Spare wheel deletion Tire Brand Continental Tire Brand Michelin Parking Package Parking Package Security alarm with interior motion sensor*

SPRINTER PASSENGER



		2500	
Tires		Single	
Wheelbase	14	14"	170"
ngines	Diesel	Diesel	Diesel
Privetrain	4x2	4x4	4x2
Roof height Passenger capacity	High Roof 12	High Roof 12	High Roof
lows of seats	Four	Four	Five
XTERIOR			
ongth	593.2 cm	593.2 cm	696.7 cm
ength	(233.5")	(233.5")	(274.3")
eight	290.1 cm (114.2")	298.7 cm (117.6")	288.4 cm (113.5")
/idth - excluding mirrors	202.0 cm (79.5")	202.0 cm (79.5")	202.0 cm (79.5")
/idth – including mirrors	234.5 cm (92.3")	234.5 cm (92.3")	234.5 cm (92.3")
ire track front	170.6 cm (67.2")	172.1 cm (67.8")	170.6 cm (67.2")
ire track rear	173.2 cm	173.2 cm	173.2 cm
ront overhang BA	(68.2") 102.1 cm	(68.2") 102.1 cm	(68.2") 102.1 cm
ear overhang	(40.2") 124.6 cm	(40.2") 124.6 cm	(40.2") 162.1 cm
rear axle to end of frame)	(49.1")	(49.1")	(63.8")
oad height, unloaded ground to cargo floor)	69.6 cm D (27.4" D)	78.1 cm (30.7")	66.7 cm (26.3")
oad height, loaded ground to cargo floor)	60.5 cm (23.8")	69.2 cm (27.2")	60.7 cm (23.9")
ide-door opening height	181.8 cm (71.6")	181.8 cm (71.6")	181.8 cm (71.6")
ide-door opening width – sliding	129.8 cm (51.1")	129.6 cm (51.0")	129.6 cm (51.0")
lear cargo door opening height	184.6 cm	184.6 cm	184.6 cm
ear cargo door opening width	(72.7") 155.5 cm	(72.7") 155.5 cm	(72.7") 155.5 cm
urning radius	(61.2") 12.4 m	(61.2") 13.2 m	(61.2") 14.4 m
curb-to-curb)	(40.7')	(43.3')	(47.2')
Fround to first step-side	52.1 cm (20.5")	61.5 cm (24.2")	50.7 cm (20")
NTERIOR			
eadroom (1st row)	143.3 cm (56.4")	143.3 cm	143.3 cm
houlder room (1st row)	171.3 cm	(56.4") 171.3 cm	(56.4") 171.3 cm
	(67.4") 161.7 cm	(67.4") 161.7 cm	(67.4") 161.7 cm
ip room (1st row)	(63.7")	(63.7")	(63.7")
egroom (1st row)	98.9 cm (38.9")	98.9 cm (38.9")	98.9 cm (38.9")
argo length, front (at floor)	91.3 cm	91.3 cm	122.9 cm
	(35.9") 65 cm	(35.9") 65 cm	(48.4") 96.3 cm
argo length, front (at belt)	(25.6")	(25.6")	(25.6")
argo width between wheelhouses	134.6 cm (53.0")	134.6 cm (53.0")	134.6 cm (53.0")
laximum floor width	177.4 cm (69.8")	177.4 cm (69.8")	177.4 cm (69.8")
nterior standing height	191.8 cm (75.5")	191.8 cm (75.5")	191.8 cm (75.5")
ARGO CAPACITY		, , , , , , , , , , , , , , , , , , , ,	
argo volume	2.2 cu. m.	2.2 cu. m.	3.1 cu. m.
pehind last row of seats)	(78.6 cu. ft.)	(78.6 cu. ft.)	(111.2 cu. ft.)
aximum roof load	110 kg (243 lbs.)	110 kg (243 lbs.)	110 kg (243 lbs.)
laximum available GCWR	6,319 kg (13,930 lbs.)	6,319 kg (13,930 lbs.)	4,300 kg (9,480 lbs.)
AXIMUM CAPABILITIES	(13,730 IDS.)	(13,730 108.)	(3,400 lbs.)
	1,425 kg	1,305 kg	1,375 kg
aximum payload	(3,142 lbs.)	(2,877 lbs.)	(3,031 lbs.)
laximum towing ¹⁶	2,268 kg (5,000 lbs.)	2,268 kg (5,000 lbs.)	0 kg (0 lbs.)
VWR	4,105 kg (9,050 lbs.)	4,105 kg (9,050 lbs.)	4,300 kg (9,480 lbs.)
WR (maximum loaded trailer	227 kg (500 lbs.)	227 kg (500 lbs.)	227 kg (500 lbs.)

SPRINTER CAB CHASSIS



- 1							
	1			l		1 1	- 1
۱ŏ	ļ,		۱š	٥		X	200
350	4 50		350	4 50		350	4 20
X	X	Deletion of end crossmember	Х	Х	Front axle reinforced	Ш	Х
X	X	Deactivation lamp monitoring failure	X	Х	Stabilization Level II	X	Х
		TIRES & WHEELS			SAFETY & SECURITY		
X	X	5.5 J x 16 steel wheels	X	X	Longitudinal member reinforcement	X	X
Х	Х	Dual rear wheel tires	Х	Х			
Х	Х	Provisional spare wheel bracket frame mounted	Х	Х			
		Spare wheel	Х	Х			
		Tires LT 215/85 R16	Х	Х			
	20	X	X	X	No. No.	X	No. No.

OPTIONAL FEATURES (CAB CHASSIS)

SEATING

X	X	Cutoff relay for additional battery	Χ	Х	Fuel gauge, optimized for aux. fuel tap	X	Х
X	Х	End crossmember bolted	Χ	Х	Parametric Special Module (PSM)	Х	Х
X	Х	Engine oil level display at cold start	Χ	X	Speed limitation, 65 mph	X	Х
X	X	Front axle reinforced (standard on 4500 model)	Χ		Starter upgraded**	X	Х
X	X	Front engine bracket for additional alternator	Χ	Х	Top speed limitation, 75 mph	X	Х
X	X	Front engine bracket for auxiliary A/C compressor	Χ	Х	Trailer crossmember 7,500 lbs. capacity	X	Х
	X X X X X X X X X X	X X X X X X X X X X	X X • End crossmember bolted X X • Engine oil level display at cold start X X • Front axle reinforced (standard on 4500 model)	X X • End crossmember bolted X X X • Engine oil level display at cold start X X X • Front axle reinforced (standard on 4500 model) X X X • Front engine bracket for additional alternator X	X X * End crossmember bolted X X X X * Engine oil level display at cold start X X X X X * Front axle reinforced (standard on 4500 model) X X X X * Front engine bracket for additional alternator X X	X X • End crossmember bolted	X X • End crossmember bolted X X X • Parametric Special Module (PSM) X X X • Engine oil level display at cold start X X • Speed limitation, 65 mph X X X X • Front axle reinforced (standard on 4500 model) X • Starter upgraded** X X X • Front engine bracket for additional alternator X X X • Top speed limitation, 75 mph X

X X • Heated driver seat X X • Heated front passenger seat Artico Man-made Leather Black Fabric Caluma Black

INTERIOR								
115V socket	Х	X	Fuel-fired pre-heater/booster (17,000 BTU)	Х	Х	Overhead storage slot, front center	Х	Х
Acoustic Package	Х	X	Heat insulation, front compartment	Х	Х	Rear heater prep	Х	X
Cab rear wall liner	Х	X	Hinged lid for storage compartment	Х	Х	Rear wall deletion - Chassis cab	Х	Х
Charging Package, dashboard	Х	X	Illuminated front exits	Х	Х	Sirius Satellite Radio	X	Х
Cigarette lighter & ash cup, front	X	X	Instrument cluster with color display	Х	Х	Lockable storage compartment above windshield	X	Х
Door-mounted assist handle, driver & passenger	Х	X	Keys, two additional masters	Х	Х	THERMOTRONIC automatic climate control	Х	X
Electrical pre-installation for load compartment lighting	X	X	Leather steering wheel	Х	Х	Tray for smartphones incl. wireless charging	Х	X
Electrically heated windshield	Х	X	Multifunction steering wheel	Х	Х	Window in cab rear wall	X	X

Fuer-tired neater booster (18,000 BTU)	X_	L X	Navigation	X	LX.			
EXTERIOR						TIRES & WHEELS (CONTINUED)		
Bumpers/detachable body parts painted body color	Χ	Х	Third brake light pre-wiring	Χ	Х	Rims painted Jet Black	Х	Х
Bumpers front/rear primed	Х	X	Wire harness tail lamp with extended wiring	Χ	Χ	Spare tire carrier deletion	X	Х
DEF fluid filler cap – lockable	Х	X	Wiring for additional turn signals	Χ	Х	Spare wheel deletion	Х	Х
Deletion of "model" badge, right rear door	Х	X	TIRES & WHEELS			Tire Brand Continental	Х	Х
Heated & electrically adjustable exterior mirrors	Х	Lx	TIRES & WHEELS			Wheel chocks	Lx	Lx_
Primed side moldings	Х	X	M+S winter tires	Χ	X			
Tail lamp deletion	Χ	Ιx	Rims painted Arctic White	Χ	Χ			

SAFETY & SECURITY								
Active Distance Assist DISTRONIC®5	Χ	Χ	First-aid kit	Х	Х	Pre-wiring rearview camera (head unit display)	X	Х
Backup alarm	Χ	Χ	Fog lamp with cornering light function	Х	Х	Pre-wiring rearview camera (rearview mirror display)	X	Х
Emergency flashlight	Х	Х	Misfueling prevention for diesel	Х	Х	Security alarm with interior motion sensor	X	Х

OPTIONAL PACKAGES								
Bench Seat Package	X	X	Driver Convenience Package	Х	Χ	Super Single Tires Package	X	
Chrome Grille Package	X	Х	Exterior Lighting Package	Х	Χ	Swivel Seat Package	X	Х
Comfort Package	X	Х	Premium Package	X	Χ			
Comfort Plus Package	X	X	Premium Plus Package	Х	Χ			

TECHNICAL SPECIFICATIONS: 3500XD & 4500


		3500XD	4500			
Tires	Dual Re	ar Wheel	Super Single	Dual Rear Wheel		
Wheelbase	144"	170"	170"	144"	170"	
Engines	Diesel	Diesel	Diesel	Diesel	Diesel	
Drivetrain	4x2	4x2	4x2	4x2	4x2	
Passenger capacity	2-3	2-3	2-3	2-3	2-3	
Rows of seats	One	One	One	One	One	
EXTERIOR						
Length	624.6 cm (245.9")	694.6 cm (273.5")	694.6 cm (273.5")	624.6 cm (245.9")	694.6 cm (273.5")	
Height	239.0 cm (94.1")	238.0 cm (93.7")	237.4 cm (93.5")	239.7 cm (94.4")	238.8 cm (94.0")	
Width - excluding mirrors	202.0 cm (79.5")					
Width – including mirrors	242.6 cm (95.5")	242.6 cm (95.5")	242.6 cm (95.5")	242.6 cm (95.5")	242.6 cm (95.5")	
Front track	168.3 cm (66.3")	168.3 cm (66.3")	170.6 cm (67.2")	168.3 cm (66.3")	168.3 cm (66.3")	
Rear track	154.2 cm (60.7")	154.2 cm (60.7")	165.6 cm (65.2")	154.2 cm (60.7")	154.2 cm (60.7")	
Front overhang	40.2 cm (15.8")					
Rear overhang (rear axle to end of frame)	156.0 cm (61.4")	160.0 cm (63.0")	160.0 cm (63.0")	156.0 cm (61.4")	160.0 cm (63.0")	
Turning diameter (curb-to-curb)	13.8 m (45.3')	16.0 m (52.5')	16.0 m (52.5')	13.8 m (45.3')	16.0 m (52.5')	
Cab length	252.4 cm (99.4")	252.4 cm (99.4")	252.4 cm (99.4")	252.4 cm (99.4")	252.4 cm (99.4")	
Top of frame to top of cab	163.7 cm (64.4")					
Frame height, loaded	68.7 cm (27.0")	68.7 cm (27.0")	68.4 cm (26.9")	68.3 cm (26.9")	68.3 cm (26.9")	

TECHNICAL SPECIFICATIONS: 3500XD & 4500

	3500XD			4500			
Tires	Dual Rea	ar Wheel	Super Single	Dual Rea	ar Wheel		
Wheelbase	144"	170"	170"	144"	170"		
Engines	Diesel	Diesel	Diesel	Diesel	Diesel		
Drivetrain	4x2	4x2	4x2	4x2	4x2		
Passenger capacity	2-3	2-3	2-3	2-3	2-3		
Rows of seats	One	One	One	One	One		
INTERIOR							
Headroom	120.1 cm (47.3")						
Shoulder room	171.3 cm (67.4")						
Hip room	161.7 cm (63.7")						
Legroom	98.9 cm (38.9")	98.9 cm (38.9")	98.9 cm (38.9")	98.9 cm (38.9")	98.9 cm (38.9")		
CARGO CAPACITY							
Max available GCWR	6,917 kg (15,249 lbs.)						
MAXIMUM CAPABIL	ITIES						
Maximum payload	2,883 kg (6,356 lbs.)	2,843 kg (6,268 lbs.)	2,843 kg (6,268 lbs.)	3,370 kg (7,429 lbs.)	3,330 kg (7,341 lbs.)		
Maximum towing ¹⁶	3,402 kg (7,500 lbs.)						
GVWR	5,003 kg (11,030 lbs.)	5,003 kg (11,030 lbs.)	5,003 kg (11,030 lbs.)	5,500 kg (12,125 lbs.)	5,500 kg (12,125 lbs.)		
TWR (maximum loaded trailer weight ratings)	340 kg (750 lbs.)						

EXTERIOR & INTERIOR

EXTERIOR: NON-METALLIC

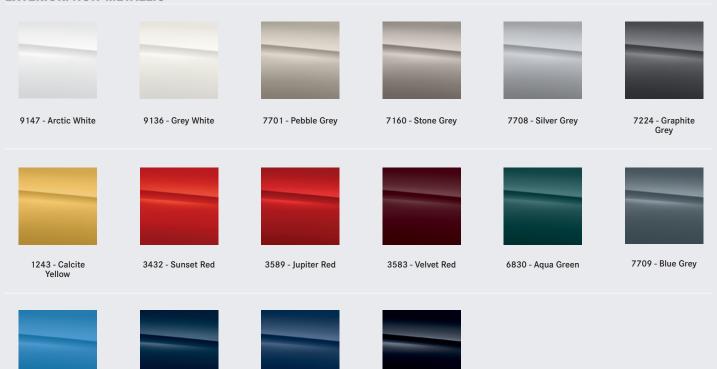

5524 - Black Blue


EXTERIOR: METALLIC


5362 - Brilliant Blue




7992 - Selenite Grey Metallic 9775 - Iridium Silver

5389 - Steel Blue





5957 - Vanda Blue





INTERIOR





VF6 - Black Leatherette



VF7 - Maturin Black Upholstery

ACCESSORIES HIGHLIGHTS

- All-Season Floor Mats
- Loading Roller
- Ladder Rack Roof Rack
- Cargo Rack
- Grille Cover
- Seat Covers
- Armrest Covers
- Wheel Cover

For paint availability please contact your dealer.

VF4 - Caluma Black Upholstery

Contact dealer for full list of accessories.

ENDNOTES

TBD values to be updated at a later date.

- 1. Active Brake Assist may not be sufficient to avoid an accident. It does not react to certain stationary objects, nor recognize or predict the curvature and/or lane layout of the road or every movement of vehicles ahead. It is the driver's responsibility at all times to be attentive to traffic and road conditions, and to provide the steering, braking and other driving inputs necessary to retain control of the vehicle. Drivers are cautioned not to wait for the system's alerts before braking, as that may not afford sufficient time and distance to brake safely. See Operator's Manual for system's operating speeds and additional information and warnings.
- Driving while drowsy or distracted is dangerous and must be avoided. ATTENTION
 ASSIST® may be insufficient to alert a fatigued or distracted driver and cannot be relied
 on to avoid an accident or serious injury.
- 3. Blind Spot Assist is a warning system only, and may not be sufficient to avoid all accidents involving vehicles in your blind spot and does not estimate the speed of approaching vehicles. It should not be used as a substitute for driver awareness and checking of surrounding traffic conditions. See Operator's Manual for system's operating speeds and additional information and warnings.
- 4. Rear Cross-Traffic Alert is not a substitute for actively checking around the vehicle for any obstacles or people. It may not detect certain objects based on their size, path, proximity or speed and angle of approach, or due to sensor obstruction, and does not control steering angle. See Operator's Manual for additional information, tips and warnings.
- 5. Active Distance Assist DISTRONIC® is no substitute for active driving involvement. It does not adapt cruising speed in response to stationary objects, nor does it predict the curvature and lane layout of the road ahead or the movement of vehicles ahead. It is the driver's responsibility at all times to be attentive to traffic and road conditions, and to provide the steering, braking and other driving inputs necessary to retain control of the vehicle. Drivers are cautioned not to wait for the system's alerts before braking, as that may not afford sufficient time and distance to brake safely. Braking effectiveness also depends on proper brake maintenance, and tire and road conditions. See Operator's Manual for system's operating speeds and additional information and warnings.
- 6. Rearview camera does not audibly notify driver of nearby objects and is not a substitute for actively checking around the vehicle for any obstacles or people. Images displayed may be limited by camera field of view, weather, lighting conditions, and the presence of dirt. ice. or snow on the camera.
- 7. Crosswind Assist can engage automatically when sensing dangerous wind gusts at highway speeds exceeding 80 kph. Performance is limited by wind severity and available traction, which snow, ice, and other conditions can affect. Always drive carefully, consistent with conditions.
- 8. No system, regardless of how advanced, can overcome the laws of physics or correct careless driving. Please always wear your seat belt. Performance is limited by available traction, which snow, ice, and other conditions can affect. Always drive carefully, consistent with conditions. Best performance in snow is obtained with winter tires.
- 9. Warning: the forces of a deploying airbag can cause serious or fatal injuries to a child under age 13. The safest seating position for your child is in a rear seat, belted into an appropriate, properly installed child seat, or correctly wearing a seat belt if too large for a child seat. See Operator's Manual for additional warnings and information on airbags, seat belts, and child seats.
- 10. Active Lane Keeping Assist may be insufficient to alert a fatigued or distracted driver of lane drift and cannot be relied on to avoid an accident or serious injury.
- 11. Requires the use of ultra-low-sulfur diesel fuel. Mercedes-Benz Sprinters are approved to use B5 biodiesel (approved diesel fuel with a maximum 5% biodiesel content) in all engines. The only approved biodiesel content is one that both meets ASTM D6751 specifications and has the oxidation stability necessary to prevent deposit-/corrosion-

- related damages to the system (min. 6h, proven by EN14112 method). Please see your service station for further information. If the B5 biodiesel blend does not clearly indicate that it meets the above standards, please do not use it. The Mercedes-Benz Vans New Vehicle Limited Warranty does not cover damage caused by fuel standards not approved by Mercedes-Benz Vans.
- 12. Driver is responsible for monitoring fluid levels and tire pressure between service visits. See Maintenance Booklet for details.
- 13. 2019 Canadian Black Book Best Retained Value Award winner, Mercedes-Benz Sprinter 2500 - Full-size Van category. Based on value retained from original MSRP for 2015 model year vehicles as published by CBB, as of January 1, 2019. See CanadianBlackBook.com for complete details.
- 14. Apple CarPlay® is a product of Apple Inc. Android™ Auto is a product of Google Inc. Device and app providers' terms and privacy statements apply. Requires connected compatible device and data plan. Apps, content and features are selected solely by their providers. Connection to apps and streaming services may be limited by the device's network connection. Data usage is routed through device and subject to fees, charges and restrictions in user's wireless plan. Vehicle's factory audio/information interface, including COMAND® navigation, may not be used simultaneously with Apple CarPlay or Android Auto. When Apple CarPlay or Android Auto is in use, the steering-wheel voice control button accesses Siri® or Google voice recognition software for voice commands.
- 15. Unsecured cargo can become hazardous in a collision. Always secure cargo.
- 16. Maximum permissible gross weight of the trailer, if the trailer is equipped with a separate functional braking system. Please make sure to comply with local trailer load regulations.
- 17. Actual rates, terms, down payment, and program eligibility will be determined by the Mercedes-Benz Financial Services Credit Team based upon the creditworthiness of the customer.
- 18. The Mercedes-Benz Vans Roadside Assistance Program is available for vehicles covered under warranty and includes such services as towing, jump-start in the event of a dead battery, and assistance with the installation of a spare tire. Service charges apply for out-of-warranty vehicles.

©2020 Mercedes-Benz Canada Inc., 98 Vanderhoof Avenue, Toronto, Ontario M4G 4C9, 1-800-387-0100. All illustrations and specifications contained in this brochure are based on the latest product information available at the time of publication. Volume measurements are according to SAE J1100. Mercedes-Benz reserves the right to make changes at any time, without notice, to colours, materials, equipment, specifications, and models. Any variations in colours shown are due to reproduction variations of the printing process. Illustrations may include test situations. European images may be shown. Some vehicles are shown with optional equipment available at extra cost. Some optional equipment may not be available individually and/or on all models. For current information regarding the range of models, standard features, optional equipment, and/or colours available in Canada and their pricing, please contact your nearest authorized Mercedes-Benz Vans dealer. All rights reserved. Bluetooth® is a registered trademark of Bluetooth SIG. Inc.

www.mbvans.ca Printed in Canada

